


**INDILUX®-D/-DS**


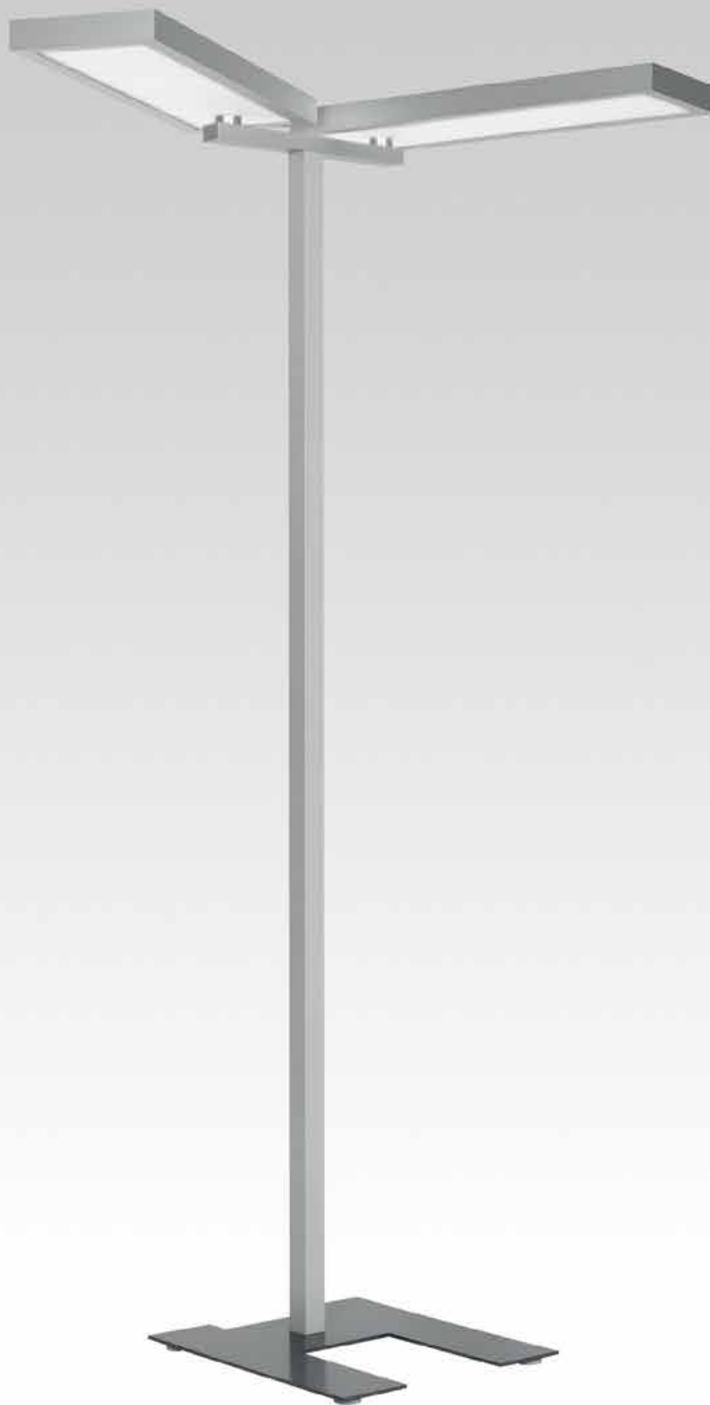


# INDILUX®-D/-DS

## THE INTELLIGENT FLOOR STANDING LUMINAIRE

Floor standing luminaire INDILUX®-D/-DS with symmetrical beam pattern with LED of the latest generation for an efficient and energy saving lighting solution. The two lighting housings are completely revolving and enable the positioning of the luminaires in positions normally regarded as unfavourable. The direct lighting component with acrylic diffuser and conical de-glaring prism [CDP] provides zonal illumination; the indirect component provides ceiling illumination in order to create the ambient lighting.

Lighting head and tubular upright in aluminium profile, footplate in steel powder-coated. The luminaire is in two different surfaces available: Lighting head and tubular upright natural anodised with footplate RAL 7015 [slate gray, matt] or all parts RAL 9016 [traffic white, glossy]. Connecting cable 2.5m with type 12 plug. The luminaire is supplied in 3 parts [footplate, upright, housing] and is easy to assemble.

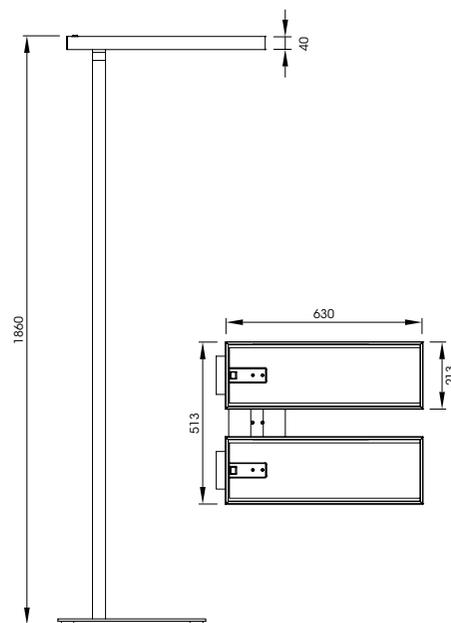

## TECHNICAL DATA

### INDILUX®-D/DS

LED-FLOOR STANDING LUMINAIRE

**Surface:** anodized with footplate in RAL 7015 [slate gray, matt] or all parts in RAL 9016 [traffic white, glossy]

**Power:** approx. 2x45W

**Light colour, Luminous flux:** 4000K [CRI, R<sub>a</sub>: 80], approx. 2x5000lm

### Dimmable:

**D:** rocker switch

**DS:** With rotationally symmetrical sensor for lighting control based on daylight levels with automatic cut-out and integrated motion detector, with push-button for desired level settings and manual regulation.

### Article numbers:

#### D: without sensor

anodized: 1322E-4030-0827

white: 1322W-4030-0827

#### DS: with sensor

anodized: 1323E-4030-0824

white: 1323W-4030-0824

Additional types available on request

**durlum GmbH**  
An der Wiese 5  
D-79650 Schopfheim

**T** +49 (0) 76 22 | 39 05-0  
**F** +49 (0) 76 22 | 39 05-42  
**E** info@durlum.com  
**I** www.durlum.com

