







Cut view
PUNTEO-J060 - S10 | LVK | Index "a" - 2 x 35°

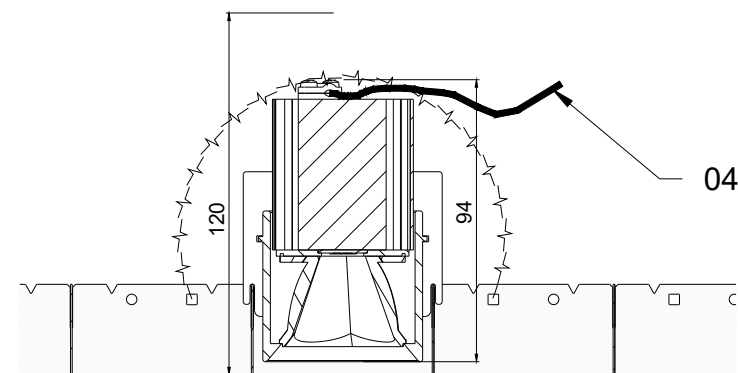


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

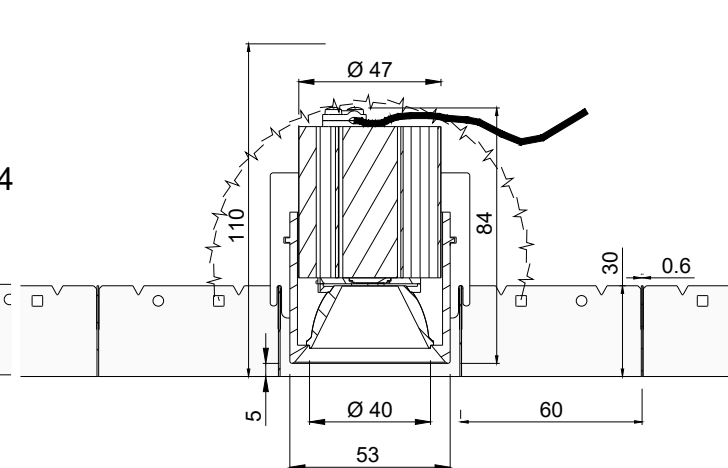


Cut view
PUNTEO-J060 S10 | LVK | Index "c" - 2 x 25°

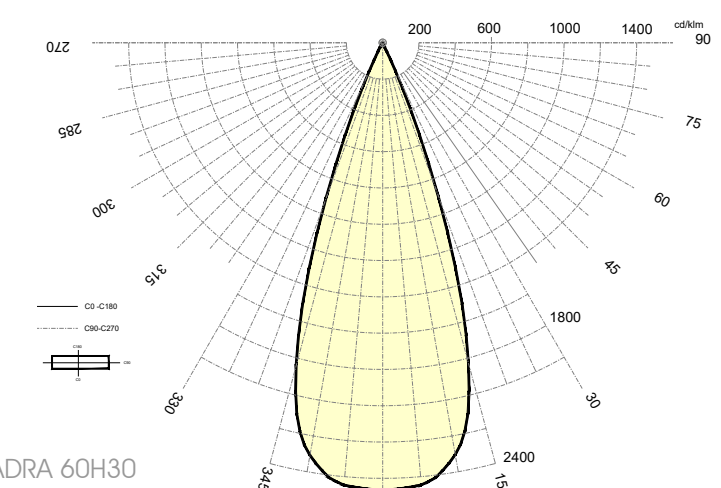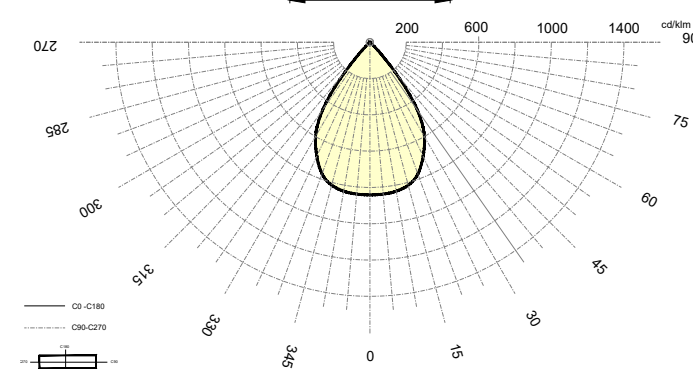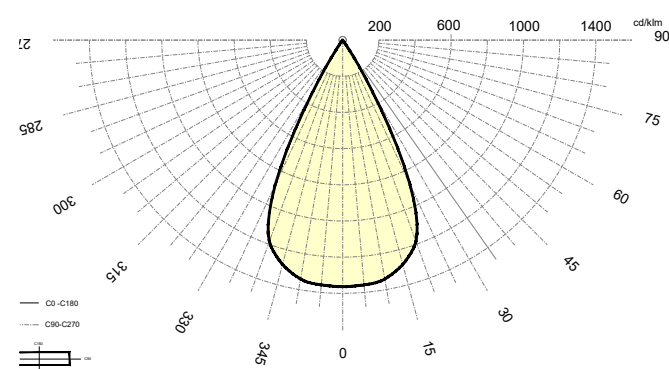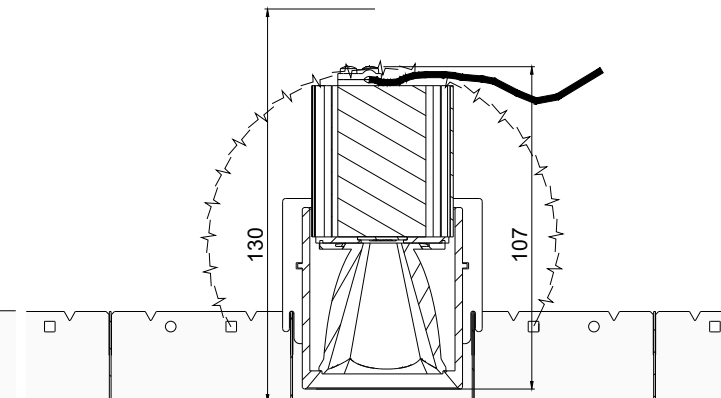

3D view
PUNTEO-J060 - S10 in QUADRA 60H30

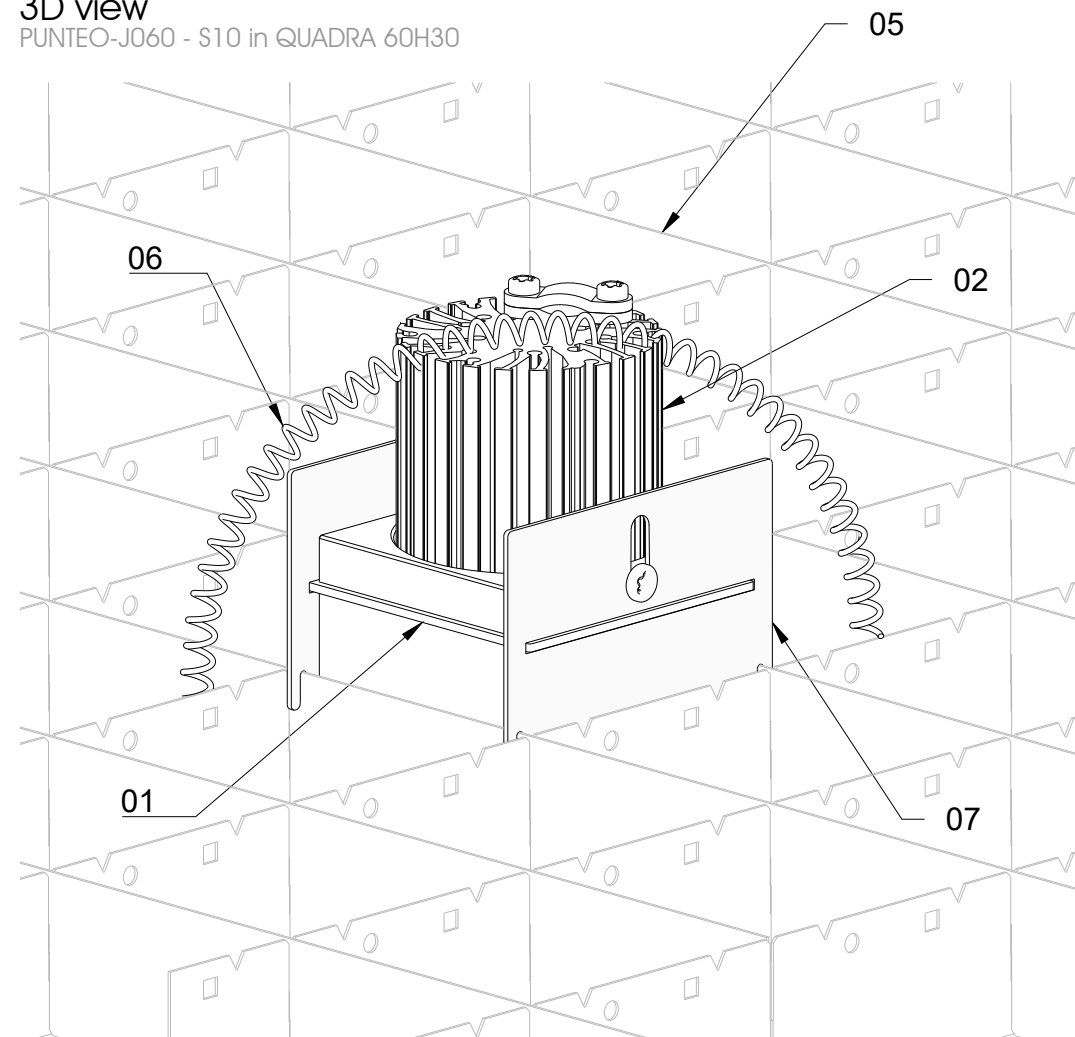

3D view
PUNTEO-J060 - S10 in QUADRA 60H30

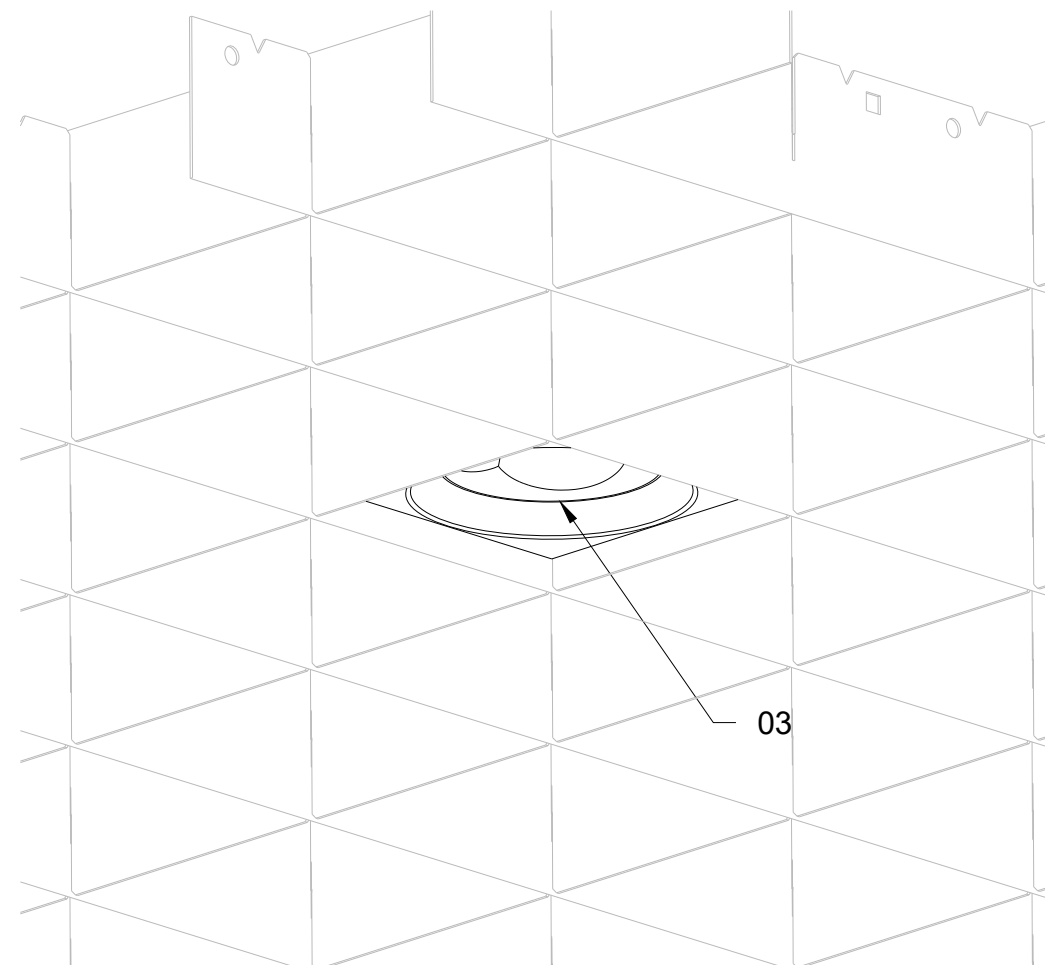

PUNTEO®-J060 - S10

PUNKT | QUADRA 60H30

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 60 x 30 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - 2 x 35° | normal beam | LOR 91 %
- ☐ b - 2 x 45° | wide beam | LOR 94 %
- ☐ c - 2 x 25° | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- ☐ 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- ☐ 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- ☐ 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- ☐ 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

- 5-PUN J - order group for Punteo J
- 060 - Light emitting surface in Ø
- S10 - System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
- a - light distribution - 2 x 35°
- 01 - light colour 2.700 K / 5.000 K | CRI 90
- D - antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable - L = 0.4 m with free cable end
05	Open cell ceiling QUADRA 60H30
06	Mounting spring
07	Module adapter - sep. item
Order no. - black : # 5-PJ060Q60H30-D1	
Order no. - white : # 5-PJ060Q60H30-B1	
other colours possible - "#X1"	


Approved

This drawing is passed on with all rights reserved to **durlum**, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany


Please refer to the general instructions for the operation

DIN ISO 9001 Zertifiziert Qualitätsmanagementsystem Reg.-Nr.: 70 100 M 851		PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		 durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Email: info@durlum.de
Date	Name	QUADAR 60 x 60 x 30		
08.07.2025	MeE	PUNTEO-J060 - S10 2025-05		





Cut view
PUNTEO-J060 - S10 | LVK | Index "a" - 2 x 35°

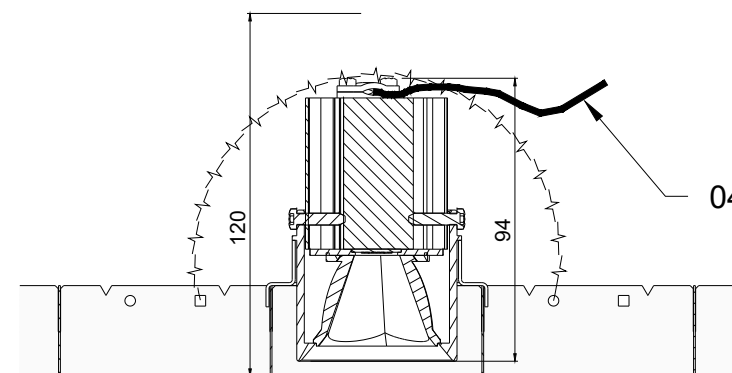


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

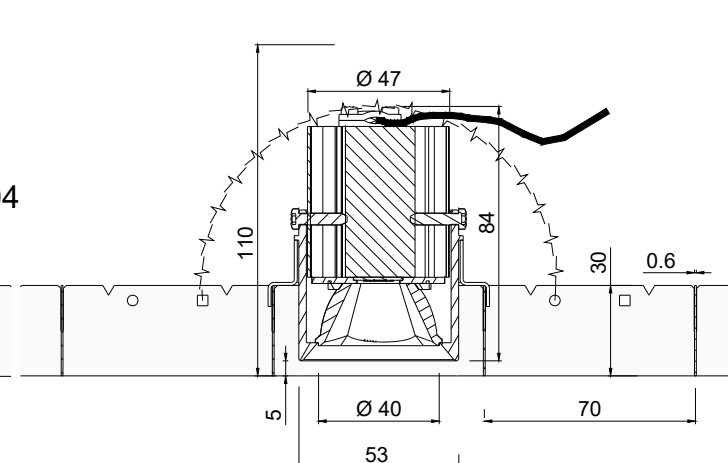


Cut view
PUNTEO-J060 - S10 | LVK | Index "c" - 2 x 25°

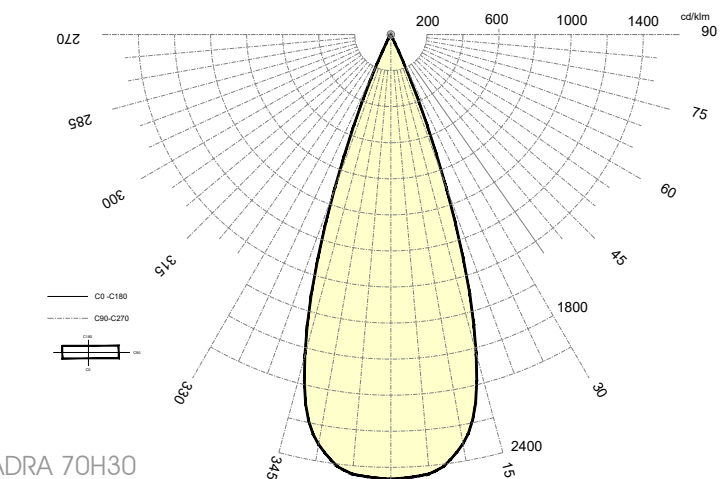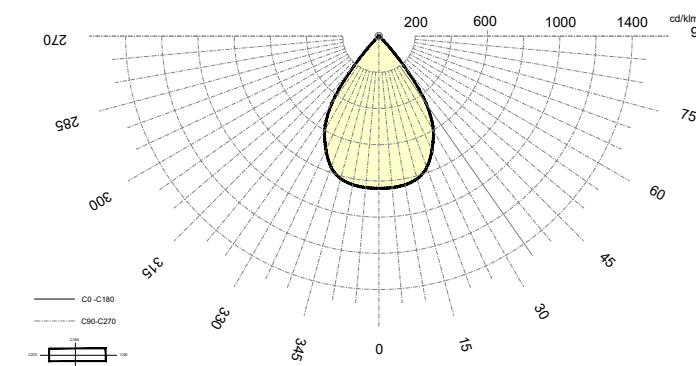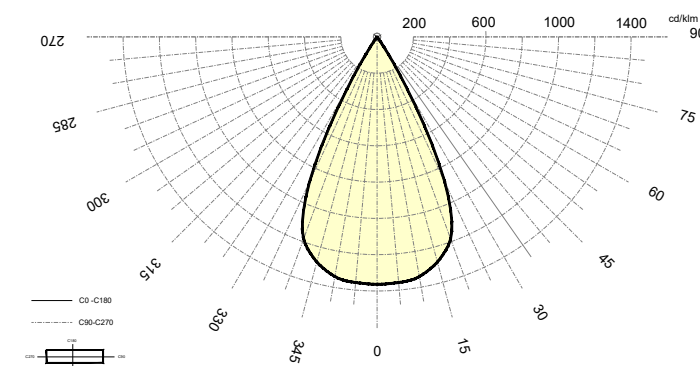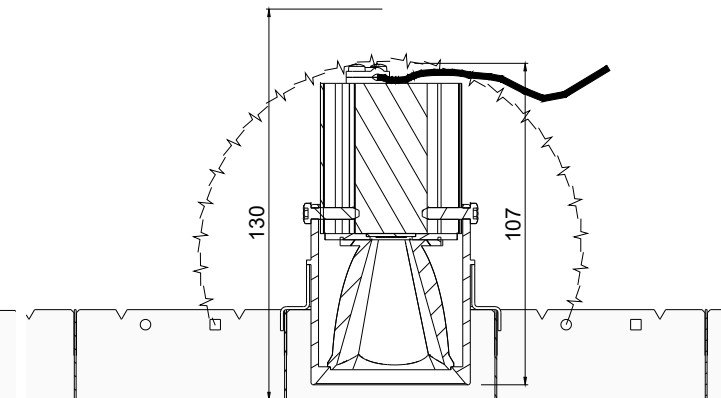

3D view
PUNTEO-J060 - S10 in QUADRA 70H30

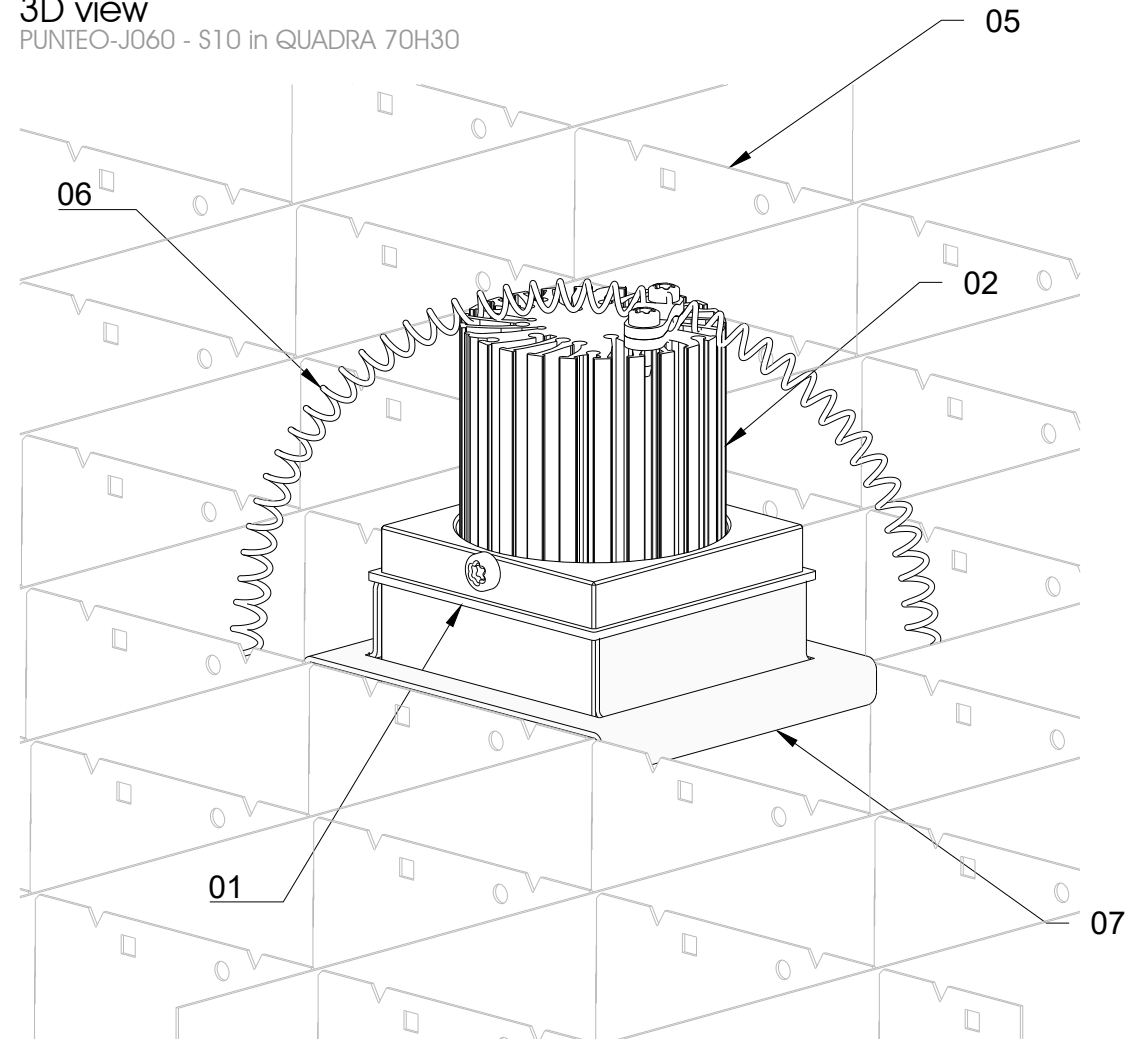

3D view
PUNTEO-J060 - S10 in QUADRA 70H30

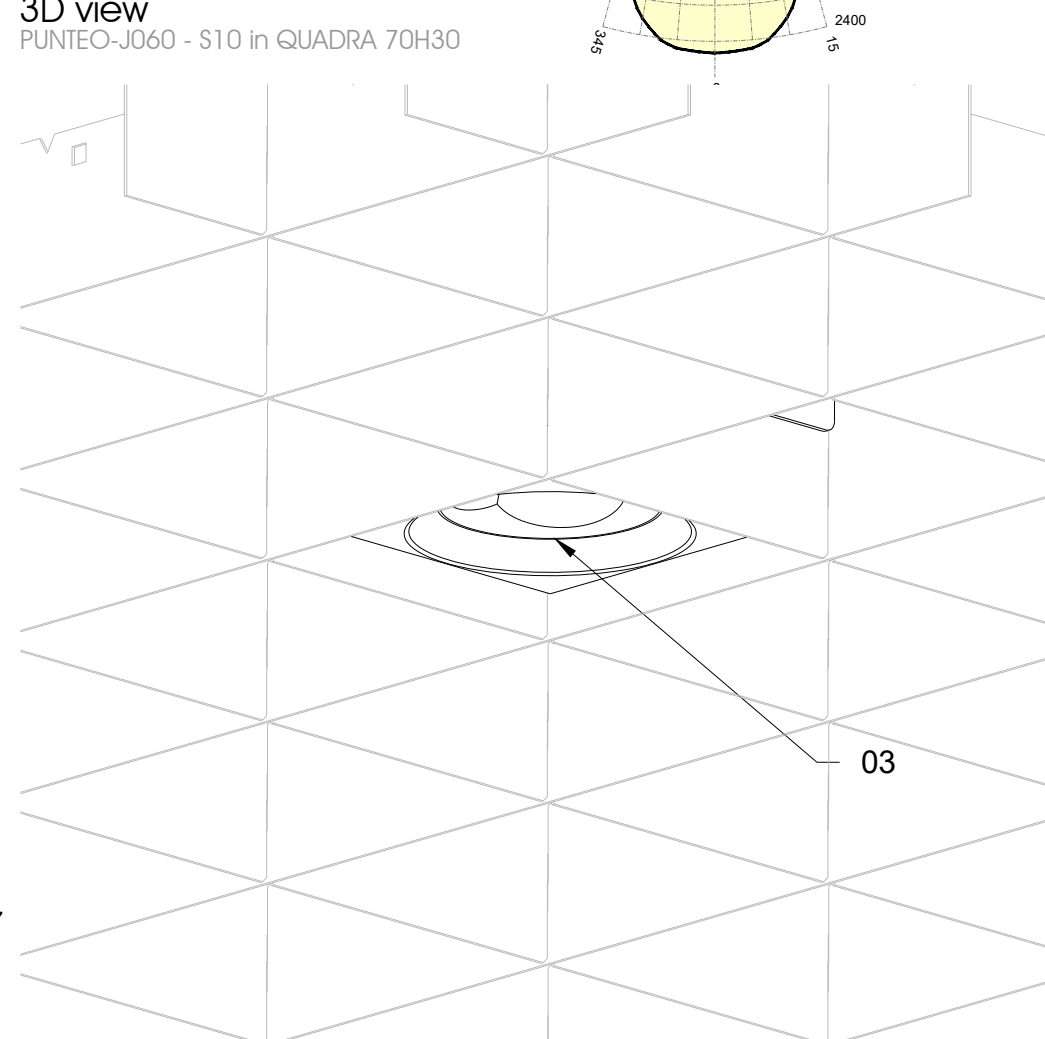

PUNTEO®-J060 - S10

PUNKT | QUADRA 70H30

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 70 x 30 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - 2 x 35° | normal beam | LOR 91 %
- ☐ b - 2 x 45° | wide beam | LOR 94 %
- ☐ c - 2 x 25° | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- ☐ 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- ☐ 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- ☐ 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- ☐ 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

- 5-PUN J - order group for Punteo J
- 060 - Light emitting surface in Ø
- S10 - System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
- a - light distribution - 2 x 35°
- 01 - light colour 2.700 K / 5.000 K | CRI 90
- D - antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable - L = 0.4 m with free cable end
05	Open cell ceiling QUADRA 70H30
06	Mounting spring
07	Module adapter - sep. item
Order no. - black : # 5-PJ060Q70H30-D1	
Order no. - white : # 5-PJ060Q70H30-B1	
other colours possible - "#X1"	


Approved

This drawing is passed on with all rights reserved to **durlum**, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany


Please refer to the general instructions for the operation

DIN ISO 9001 Zertifiziert Qualitätsmanagementsystem Reg. Nr.: 70 100 M 851		PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		 durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Email info@durlum.de
Date	Name	QUADRA 70 x 70 x 30		
08.07.2025	MeE	PUNTEO-J060 - S10 2025-05		





Cut view
PUNTEO-J060 - S10 | LVK | Index "a" - 2 x 35°

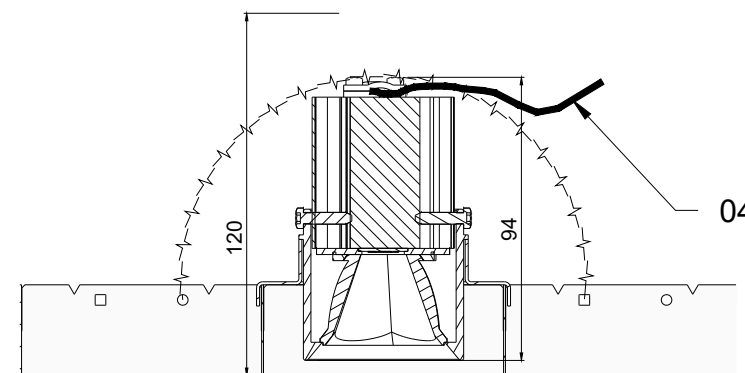


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

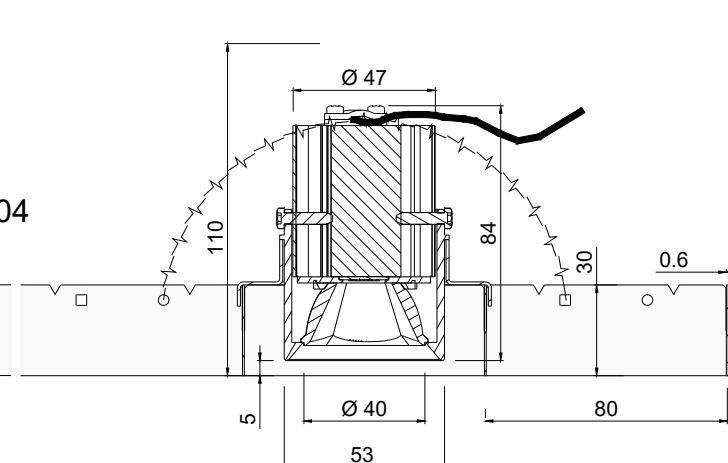


Cut view
PUNTEO-J060 - S10 | LVK | Index "c" - 2 x 25°

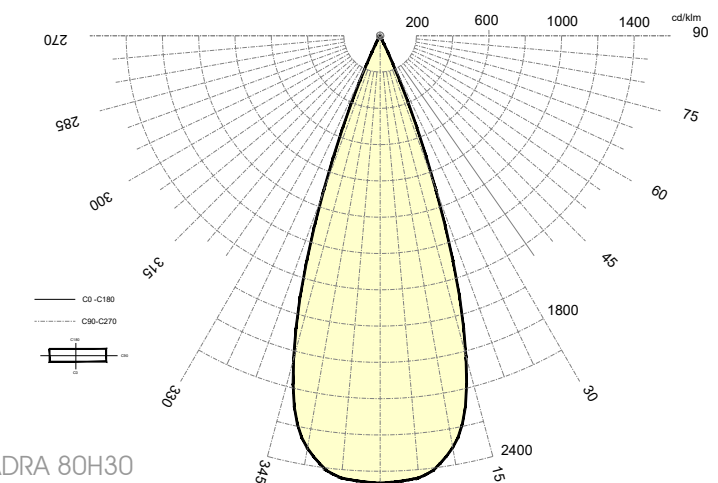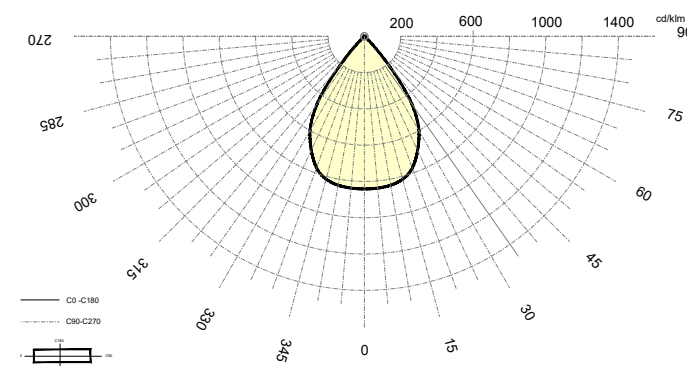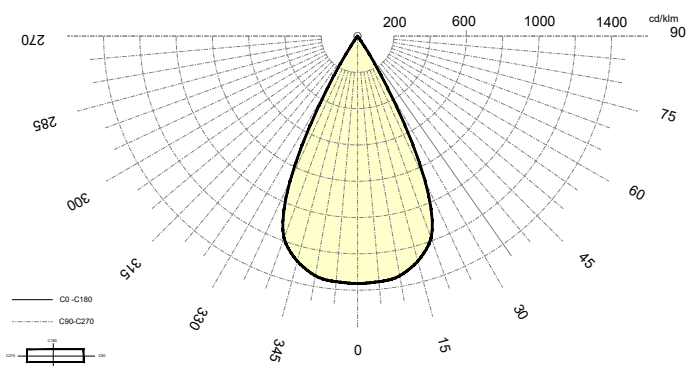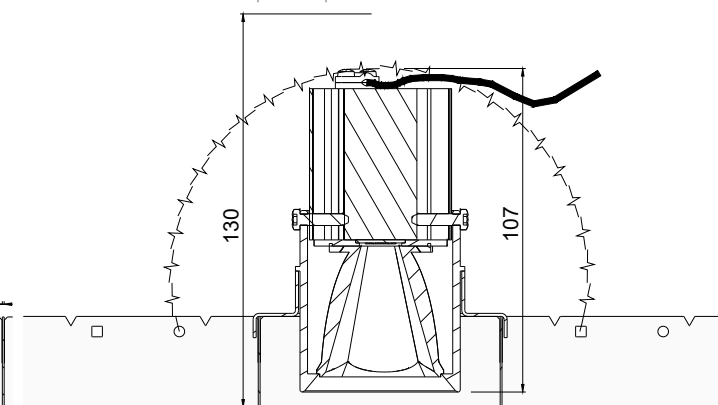

3D view
PUNTEO-J060 - S10 in QUADRA 80H30

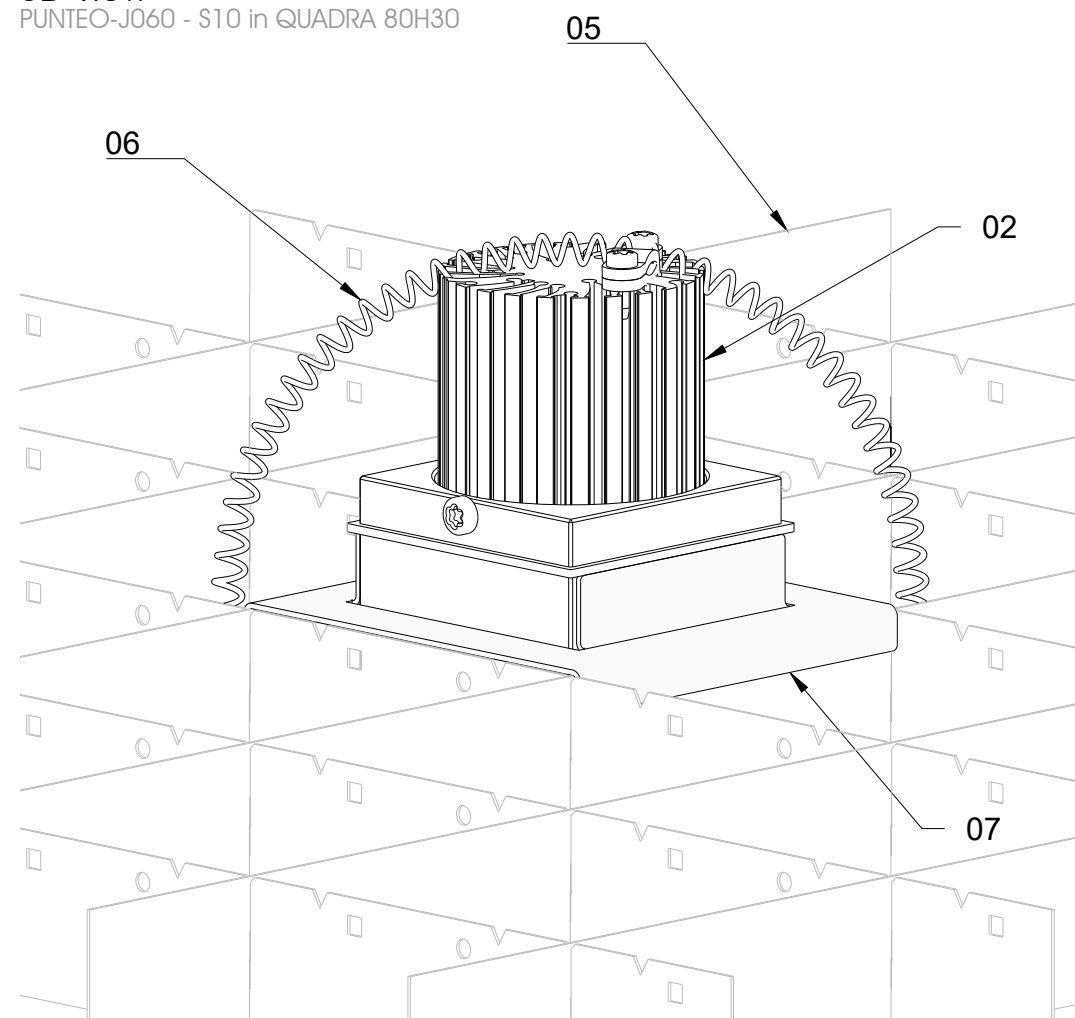

3D view
PUNTEO-J060 - S10 in QUADRA 80H30

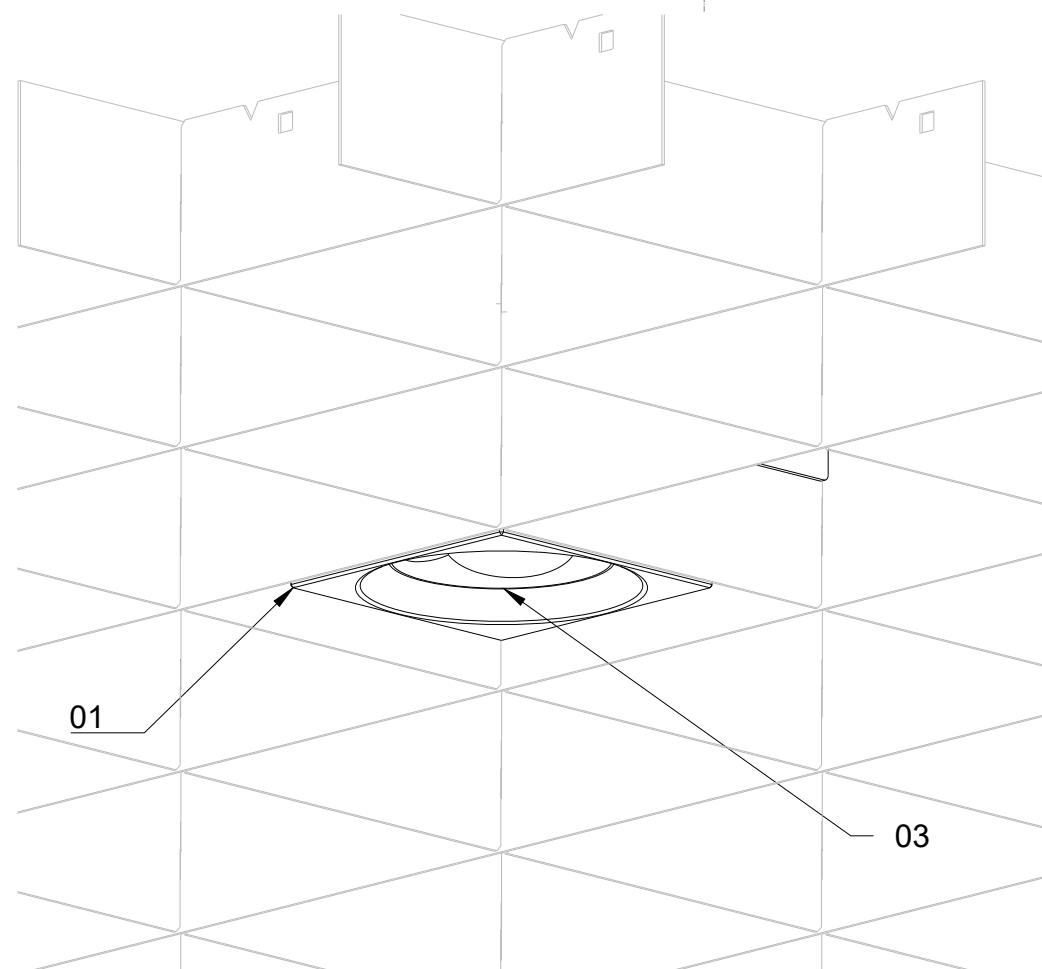

PUNTEO®-J060 - S10

PUNKT | QUADRA 80H30

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 80 x 30 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - 2 x 35° | normal beam | LOR 91 %
- ☐ b - 2 x 45° | wide beam | LOR 94 %
- ☐ c - 2 x 25° | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- ☐ 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- ☐ 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- ☐ 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- ☐ 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

- 5-PUN J - order group for Punteo J
- 060 - Light emitting surface in Ø
- S10 - System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
- a - light distribution - 2 x 35°
- 01 - light colour 2.700 K / 5.000 K | CRI 90
- D - antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable - L = 0.4 m with free cable end
05	Open cell ceiling QUADRA 80H30
06	Mounting spring
07	Module adapter - sep. item
Order no. - black : # 5-PJ060Q80H30-D1	
Order no. - white : # 5-PJ060Q80H30-B1	
other colours possible - "#-X1"	


Approved

This drawing is passed on with all rights reserved to **durlum**, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany


Please refer to the general instructions for the operation

DIN ISO 9001 Zertifiziert Qualitätsmanagementsystem (Reg.-Nr.: 70 100 M 851)		PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		 durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Email info@durlum.de
Date	Name	QUADRA 80 x 80 x 30		
08.07.2025	MeE	PUNTEO-J060 - S10 2025-05		





Cut view
PUNTEO-J060 - S10 | LVK | Index "a" - 2 x 35°

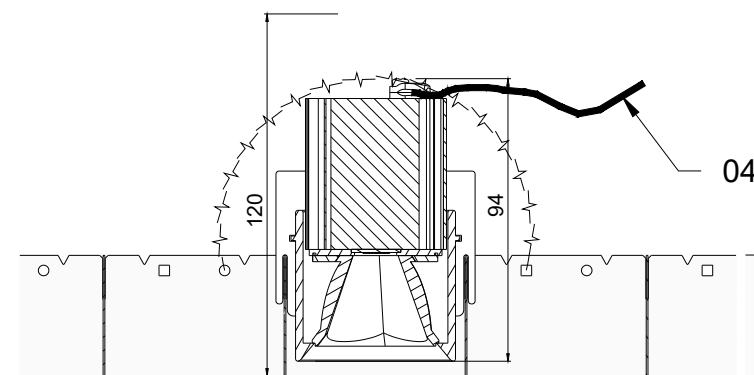


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

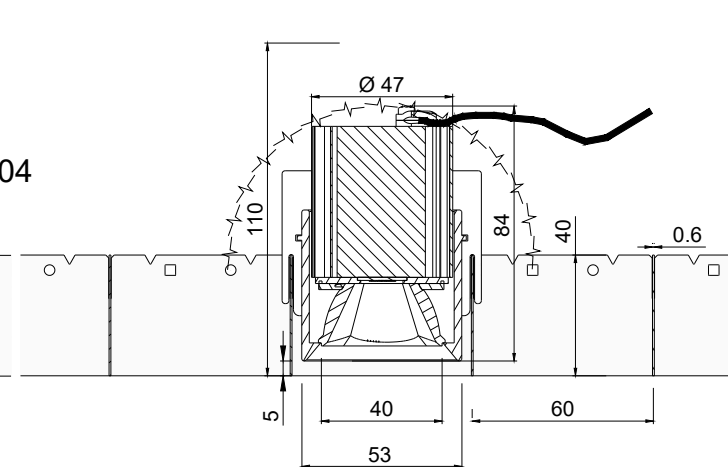


Cut view
PUNTEO-J060 - S10 | LVK | Index "c" - 2 x 25°

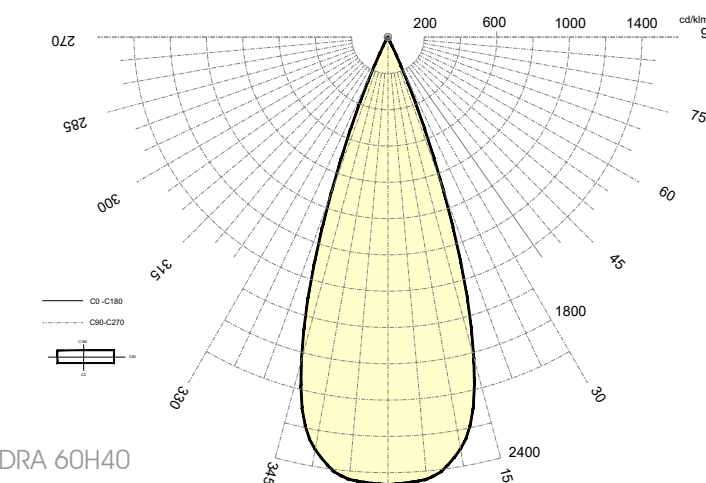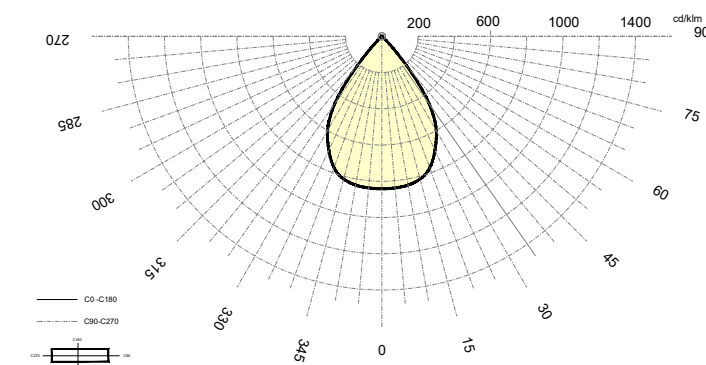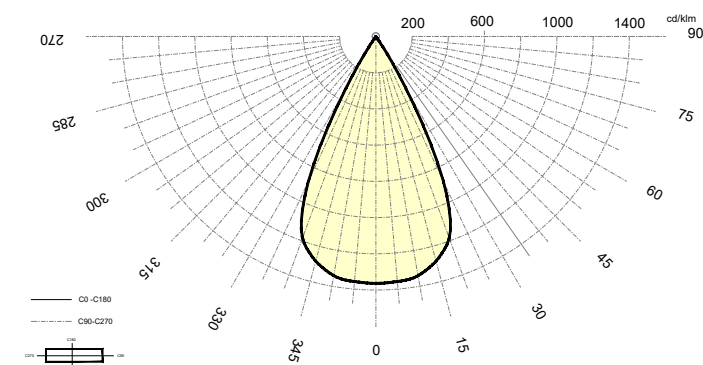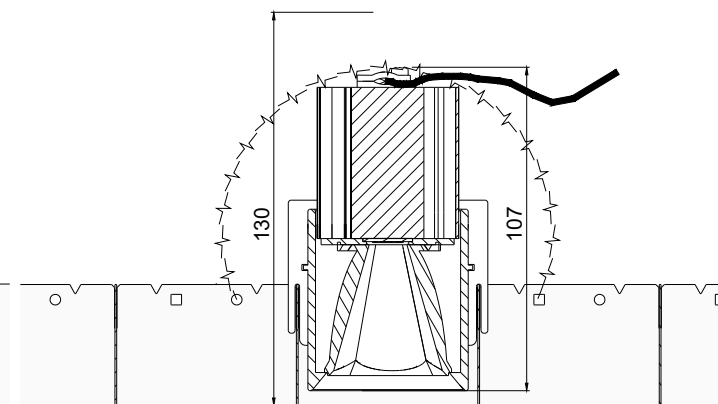

3D view
PUNTEO-J060 - S10 in QUADRA 60H40

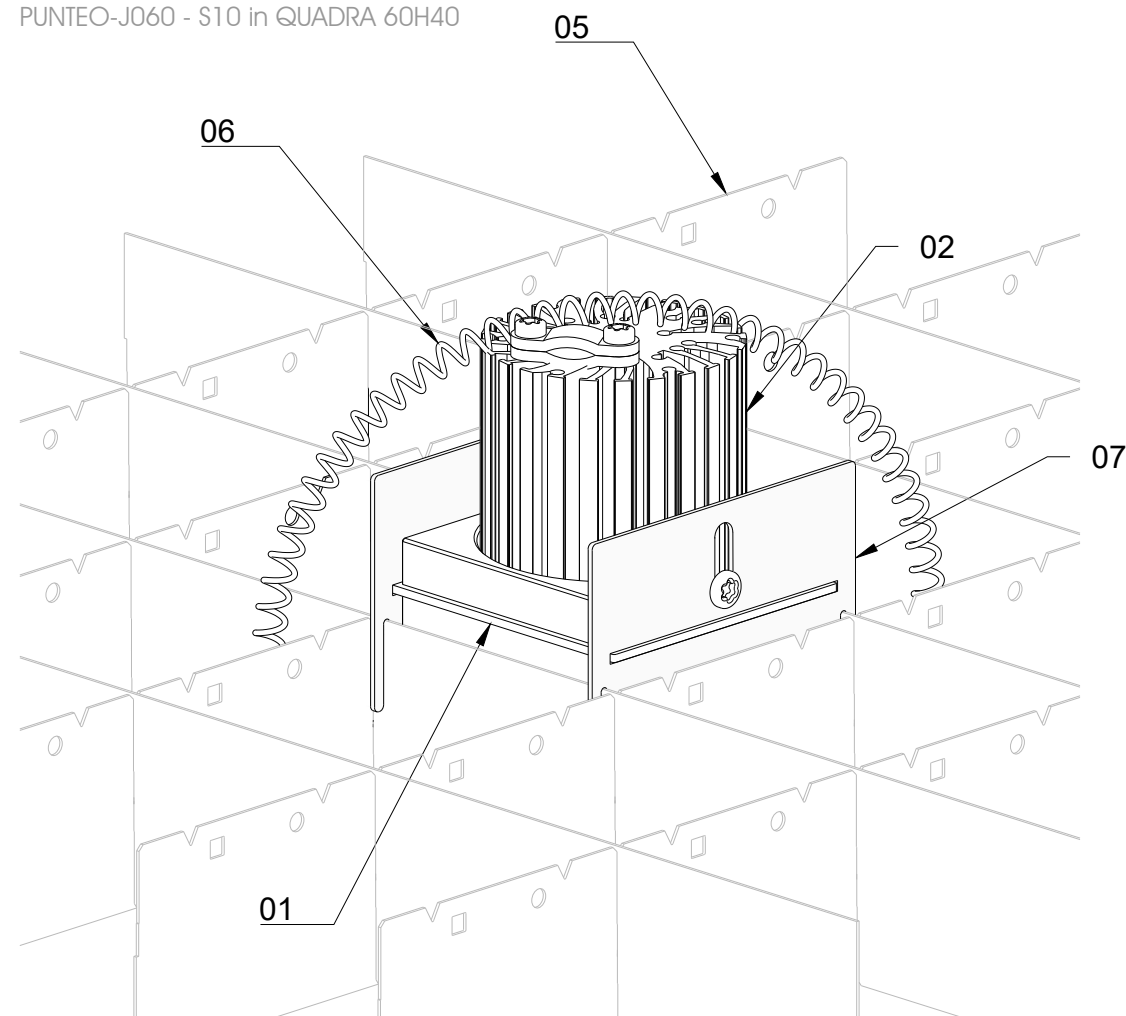

3D view
PUNTEO-J060 - S10 in QUADRA 60H40

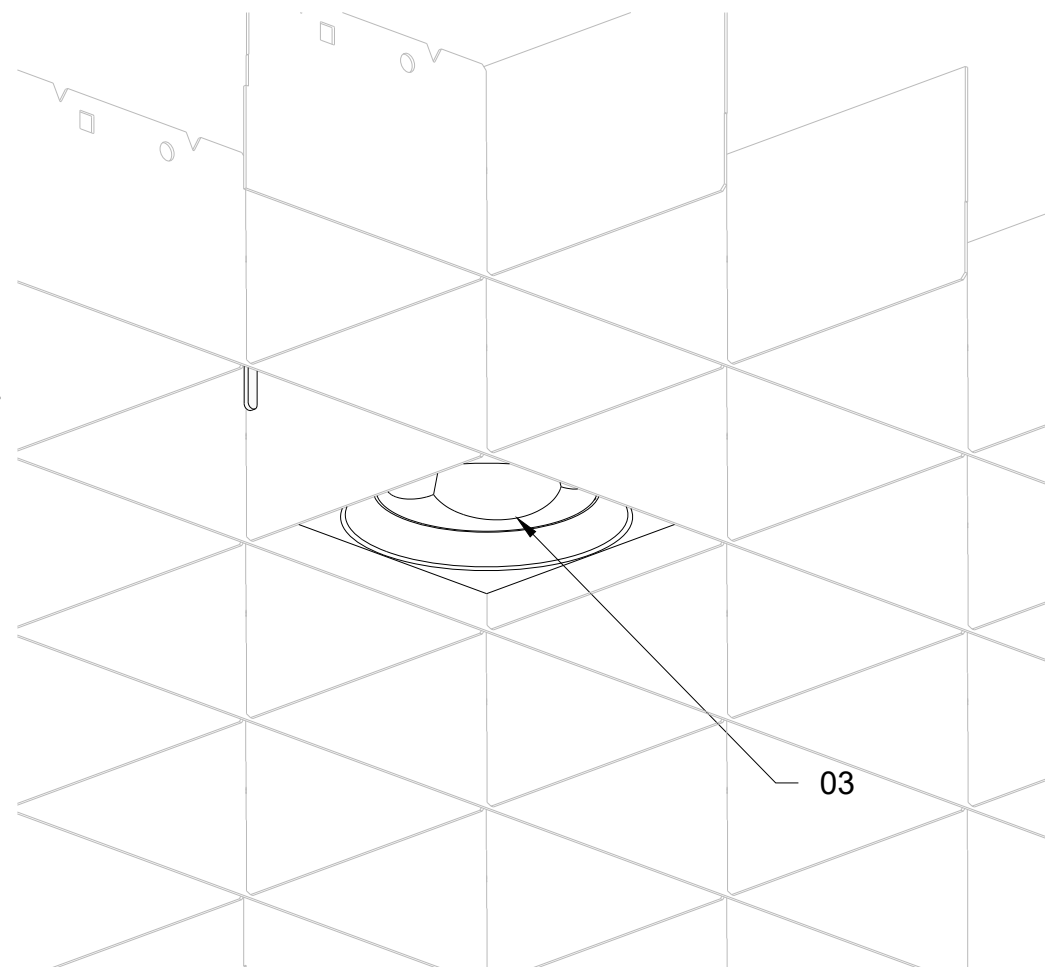

PUNTEO®-J060 - S10

PUNKT | QUADRA 60H40

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 60 x 40 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - 2 x 35° | normal beam | LOR 91 %
- ☐ b - 2 x 45° | wide beam | LOR 94 %
- ☐ c - 2 x 25° | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- ☐ 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- ☐ 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- ☐ 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- ☐ 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

- 5-PUN J - order group for Punteo J
- 060 - Light emitting surface in Ø
- S10 - System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
- a - light distribution - 2 x 35°
- 01 - light colour 2.700 K / 5.000 K | CRI 90
- D - antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable - L = 0.4 m with free cable end
05	Open cell ceiling QUADRA 60H40
06	Mounting spring
07	Module adapter - sep. item
Order no. - black : # 5-PJ060Q60H40-D1	
Order no. - white : # 5-PJ060Q60H40-B1	
other colours possible - "#X1"	



Approved

This drawing is passed on with all rights reserved to **durlum**, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany



Please refer to the general instructions for the operation

DIN ISO 9001 Zertifiziert Qualitätsmanagementsystem Reg. Nr.: 70 100 M 851		PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		 durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Email info@durlum.de
Date	Name	QUADRA 60 x 60 x 40		
08.07.2025	MeE	PUNTEO-J060 - S10 2025-05		



Cut view
PUNTEO-J060 - S10 | LVK | Index "α" - 2 x 35°

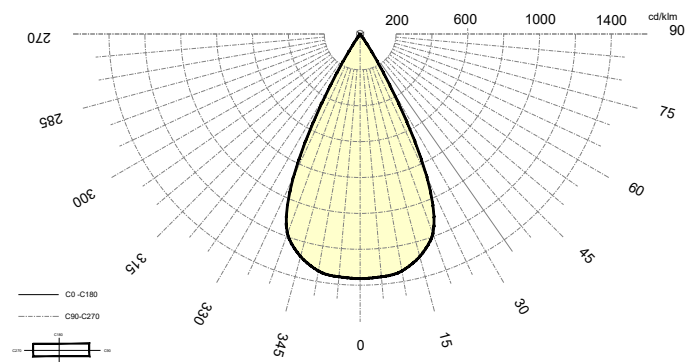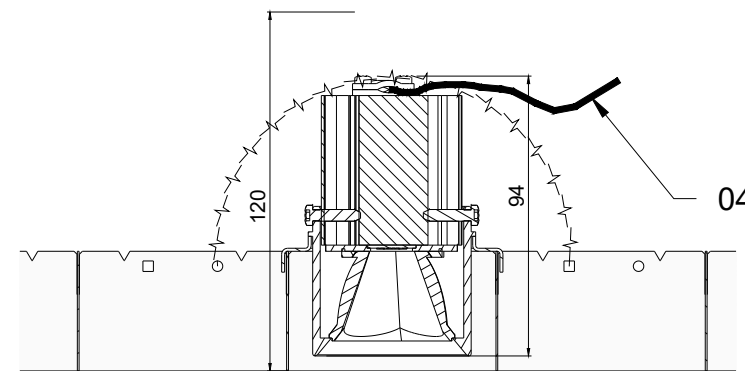


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

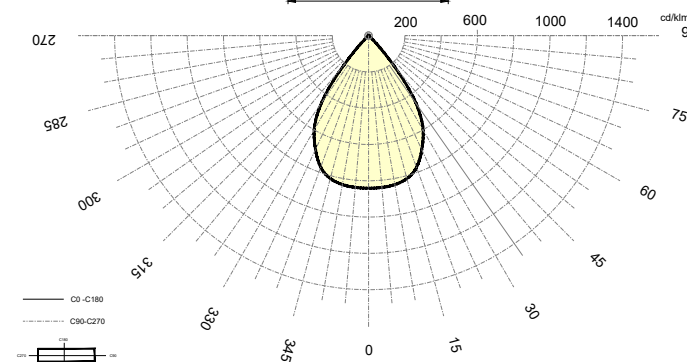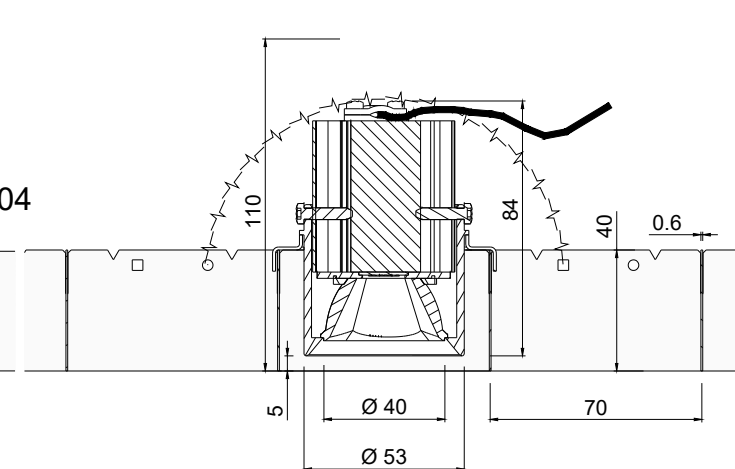


Cut view
PUNTEO-J060 - S10 | LVK | Index "c" - 2 x 25°

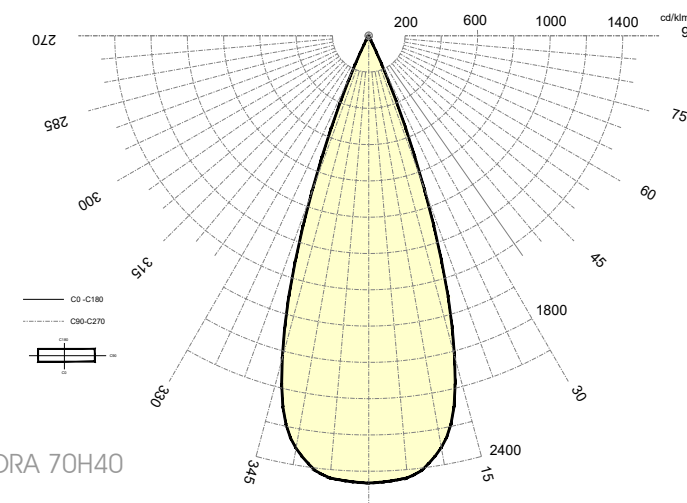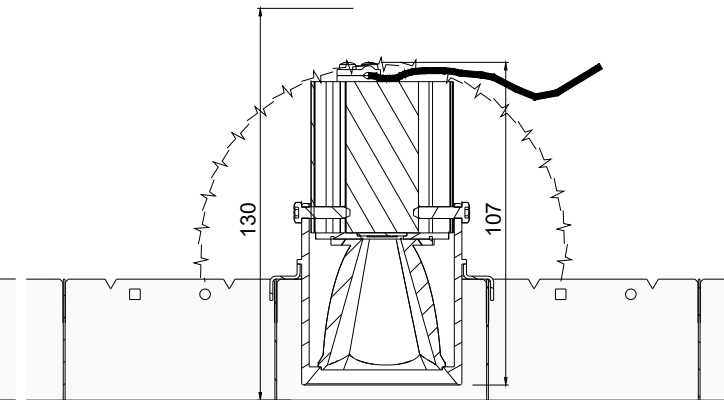

3D view
PUNTEO-J060 - S10 in QUADRA 70H40

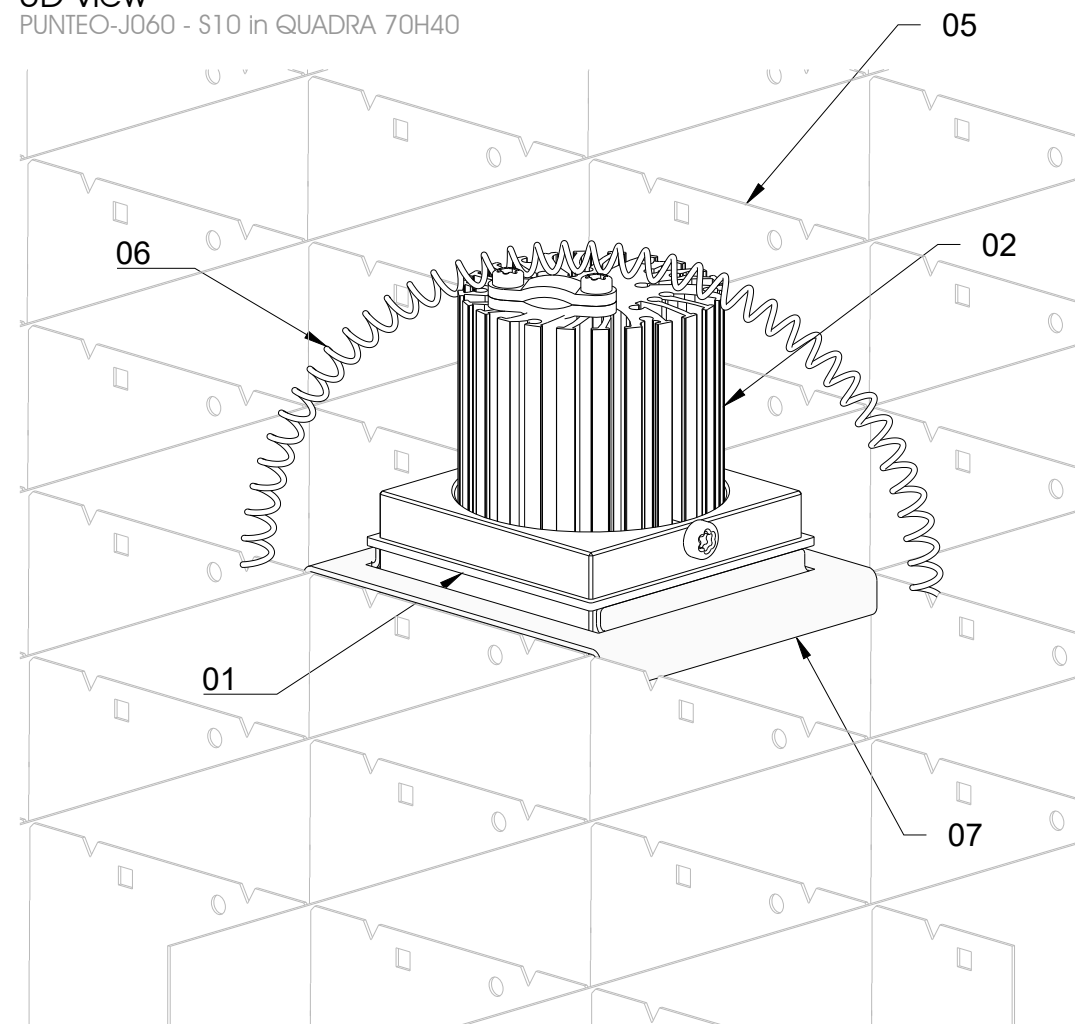

3D view
PUNTEO-J060 - S10 in QUADRA 70H40

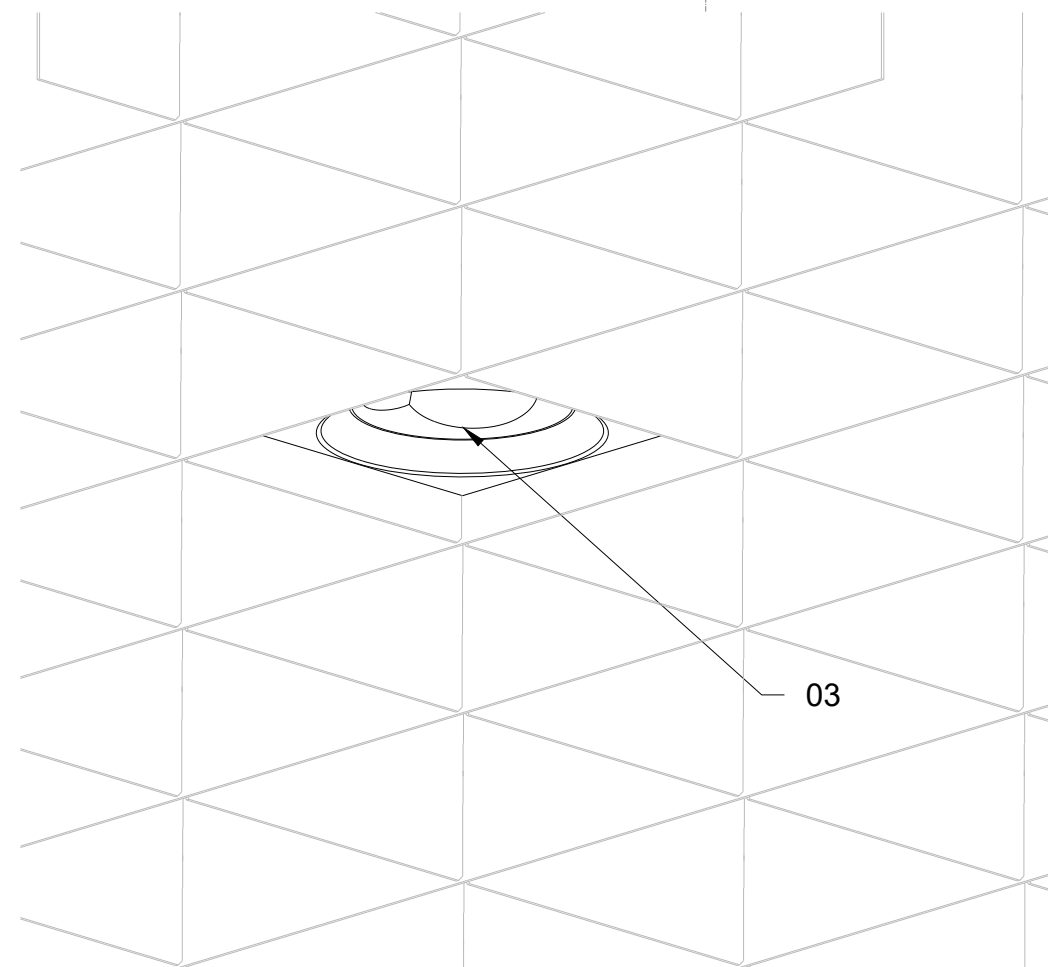

PUNTEO®-J060 - S10
PUNKT | QUADRA 70H40

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 70 x 40 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - $2 \times 35^\circ$ | normal beam | LOR 91 %
- ☐ b - $2 \times 45^\circ$ | wide beam | LOR 94 %
- ☐ c - $2 \times 25^\circ$ | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED
driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

5-PUN J	-	order group for Punteo J
Ø60	-	Light emitting surface in Ø
S10	-	System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
a	-	light distribution - 2 x 35°
Ø1	-	light colour 2.700 K / 5.000 K CRI 90
D	-	antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable...
05	Open cell ceiling QUADRA 70H40
06	Mounting spring
07	Module adapter - sep. item Order no. - black : # 5-PJ060Q70H40-D1 Order no. - white : # 5-PJ060Q70H40-B1 other colours possible - "#-X1"


Approved

DIN ISO 9001 zertifiziert Qualitätsmanagementsystem Reg. Nr.: 70 100 M 851	PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		
Date 08.07.2025	Name MeE	QUADRA 70 x 70 x 40	
		PUNTEO-J060 - S10 2025-05	
		durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Fax 0049 7622 39050 info@durlum.de	


This drawing is passed on with all rights reserved to **durlum**, and must **ONLY** be used for common purpose projects. Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany

Please refer to the general instructions for the operation





Cut view
PUNTEO-J060 - S10 | LVK | Index "a" - 2 x 35°

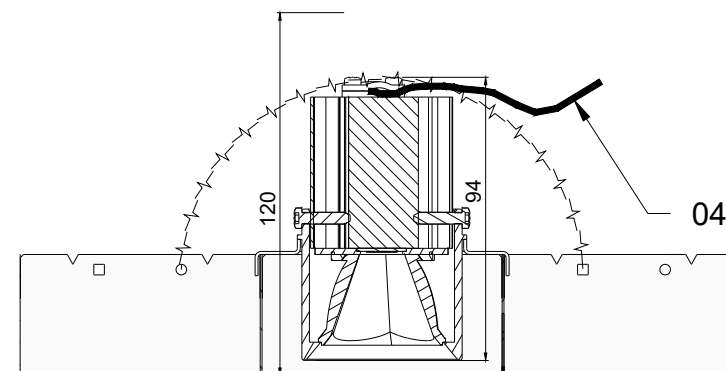


Cut view
PUNTEO-J060 - S10 | LVK | Index "b" - 2 x 45°

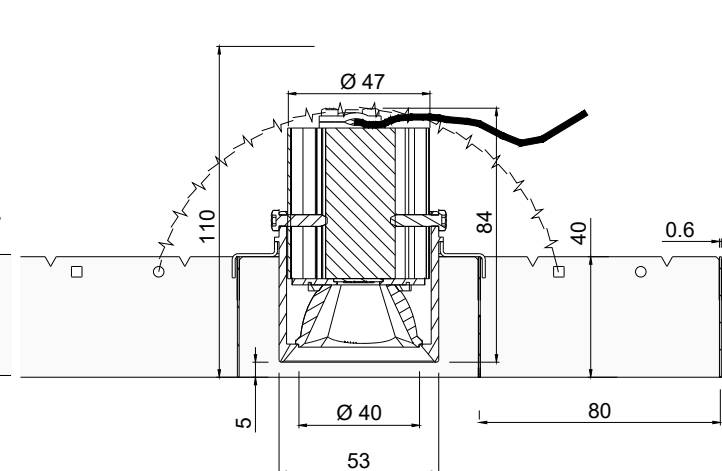


Cut view
PUNTEO-J060 - S10 | LVK | Index "c" - 2 x 25°

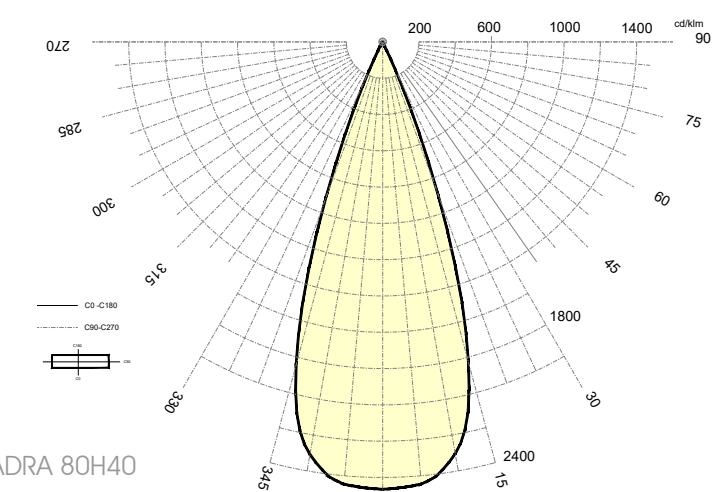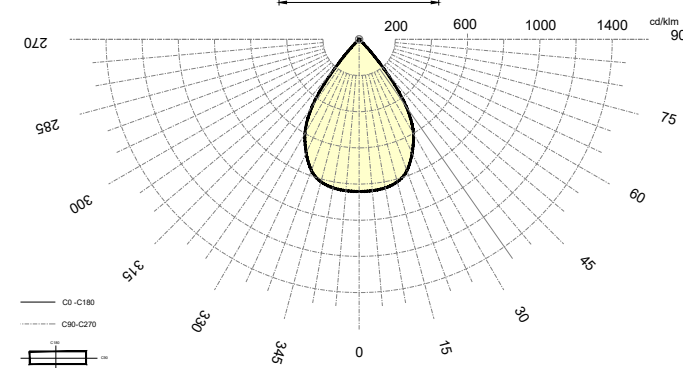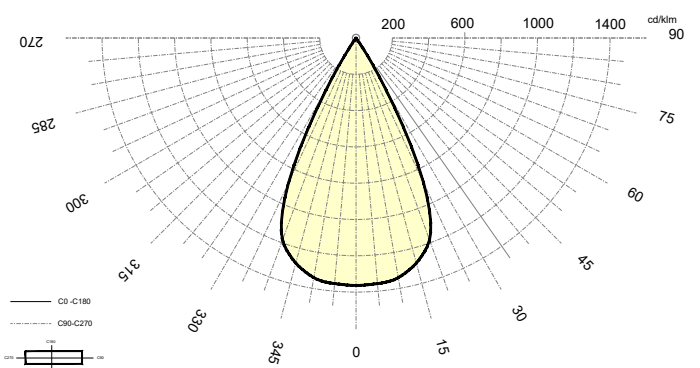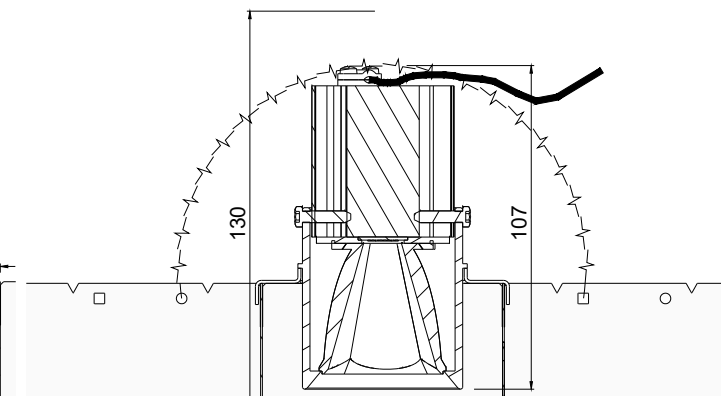

3D view
PUNTEO-J060 - S10 in QUADRA 80H40

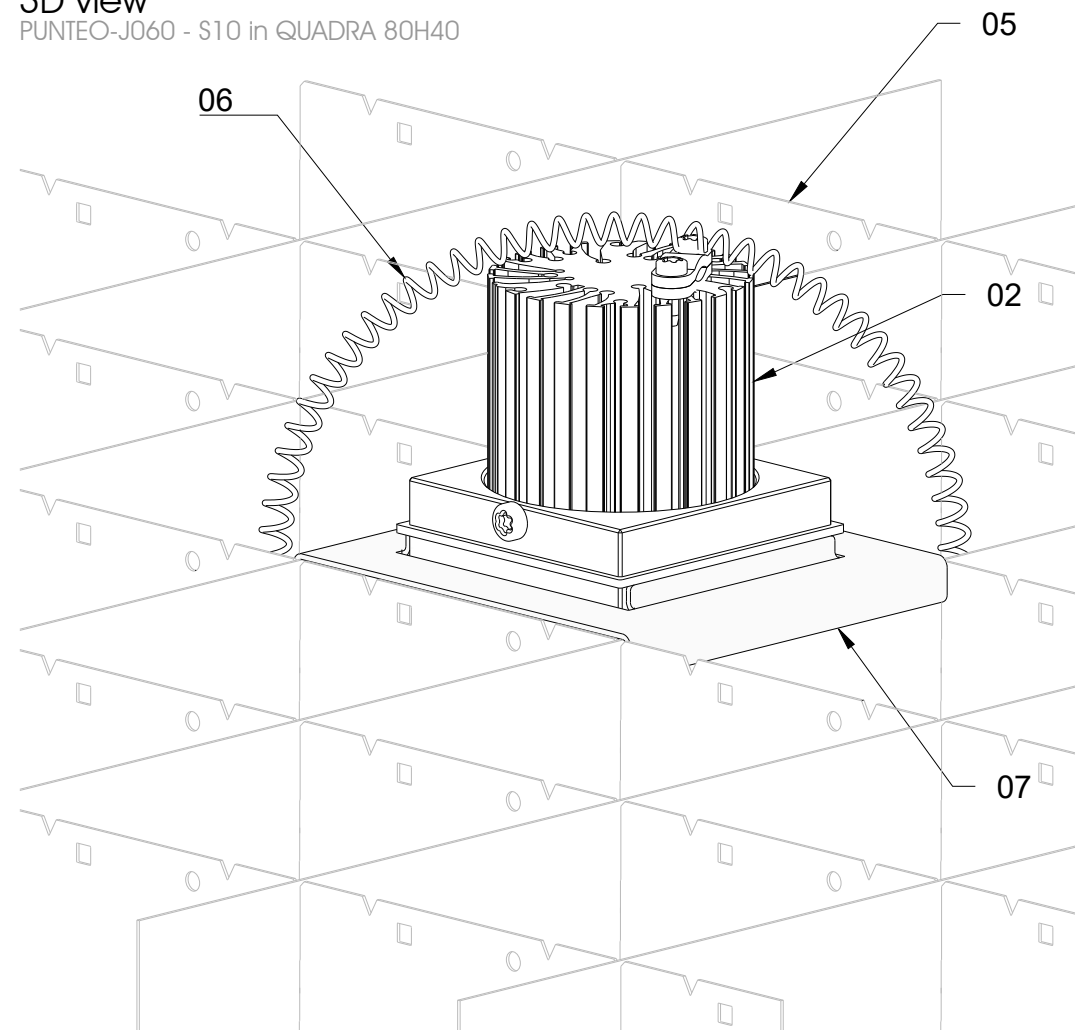

3D view
PUNTEO-J060 - S10 in QUADRA 80H40

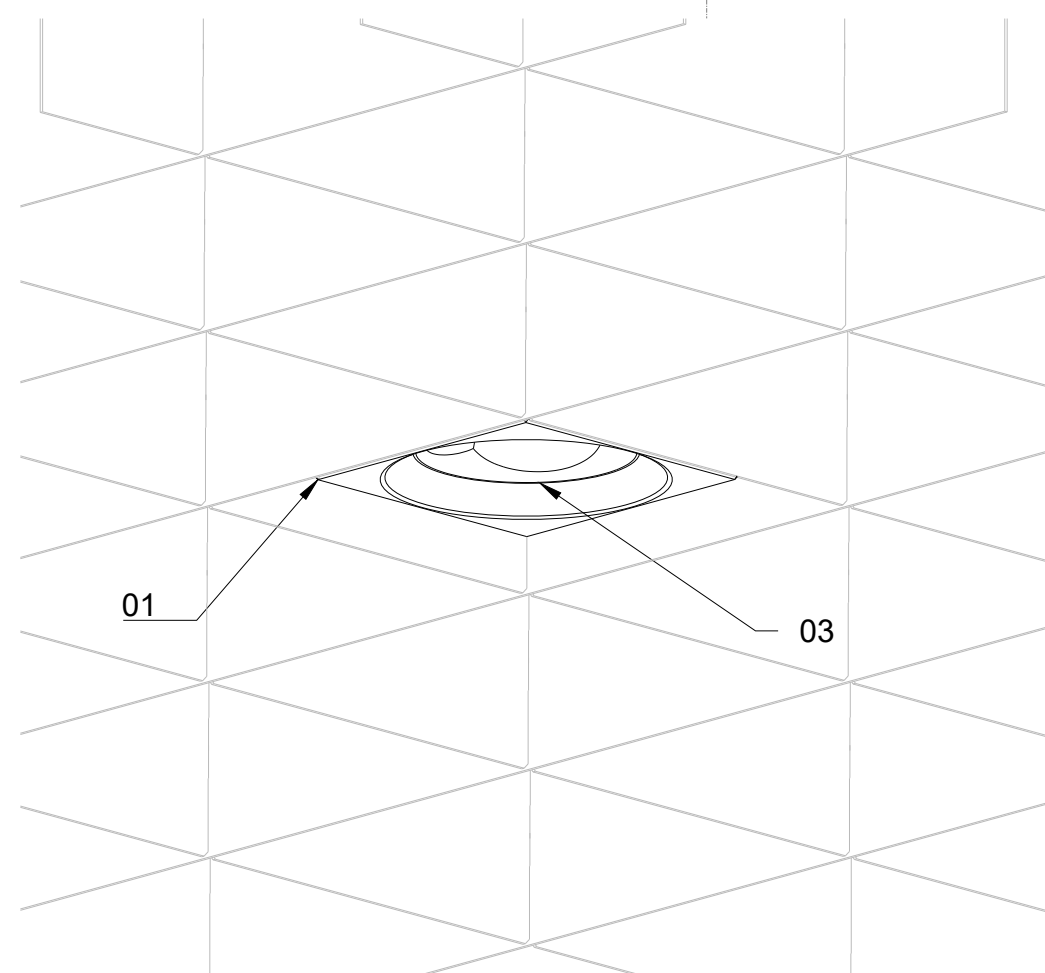

PUNTEO®-J060 - S10

PUNKT | QUADRA 80H40

PUNTEO®-J060 - built in downlight - System S10 for tool-free integration in durlum open cell ceiling
Cell size x height: 80 x 40 mm | t = 0,6 mm
This cell size requires a module adapter

Light distribution [please select option] :

- ☐ a - 2 x 35° | normal beam | LOR 91 %
- ☐ b - 2 x 45° | wide beam | LOR 94 %
- ☐ c - 2 x 25° | narrow beam | LOR 82 %
- ☐ d - asym | asym. beam | LOR 85 %

LED [please select option] :

- ☐ 01 - 2.700 K / 5.000 K | 12,5 W | 1.169/1.401 lm | CRI > 90
- ☐ 02 - 4.000 K | 12 W | 1.644 lm | CRI > 90
- ☐ 03 - 3.000 K | 12 W | 1.536 lm | CRI > 90
- ☐ 04 - 2.700 K | 12 W | 1.486 lm | CRI > 90

Surface [please select option] :

- ☐ A - white - RAL 9010, matt
- ☐ B - white - RAL 9016, matt
- ☐ C - Aluminium anodised
- ☐ D - black matt, anodised (standard)

Dimension L x B x H : 53 x 53 x 84 / 94 / 107 mm
Installation height : 110 / 120 / 130 mm

Protection class: III [light fitting without LED driver]
Protection system: IP 20

Life Time: Average L80 [Ta 25 °C] > 50.000 h

Electrical connection:
Cable 2-pin - L = 0,4 m - to connect with separate LED driver unit [not included]

Note:
LED driver unit and mounting accessories must be ordered separately.

Order number for example:

5-PUN J 060 S10a 01 A

- 5-PUN J - order group for Punteo J
- 060 - Light emitting surface in Ø
- S10 - System 10 [incl. Adapter] for integration in QUADRA open cell ceiling
- a - light distribution - 2 x 35°
- 01 - light colour 2.700 K / 5.000 K | CRI 90
- D - antiglare tube - black

01	Housing - Antiglare tube
02	Heatsink
03	Reflector - faceted
04	Cable - L = 0.4 m with free cable end
05	Open cell ceiling QUADRA 80H40
06	Mounting spring
07	Module adapter - sep. item
Order no. - black : # 5-PJ060Q80H40-D1	
Order no. - white : # 5-PJ060Q80H40-B1	
other colours possible - "#-X1"	

Approved

This drawing is passed on with all rights reserved to **durlum**, and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! **durlum** GmbH, Schopfheim, Germany

Please refer to the general instructions for the operation

DIN ISO 9001 Zertifiziert Qualitätsmanagementsystem (Reg.-Nr.: 70 100 M 851)		PUNTEO-J060 - S10 Integration in open cell ceiling durlum technical documents		 durlum GmbH 79650 Schopfheim Germany Tel. 0049 7622 39050 Email info@durlum.de
Date	Name	QUADRA 80 x 80 x 40		
08.07.2025	MeE	PUNTEO-J060 - S10 2025-05		