




Cut View M1:5

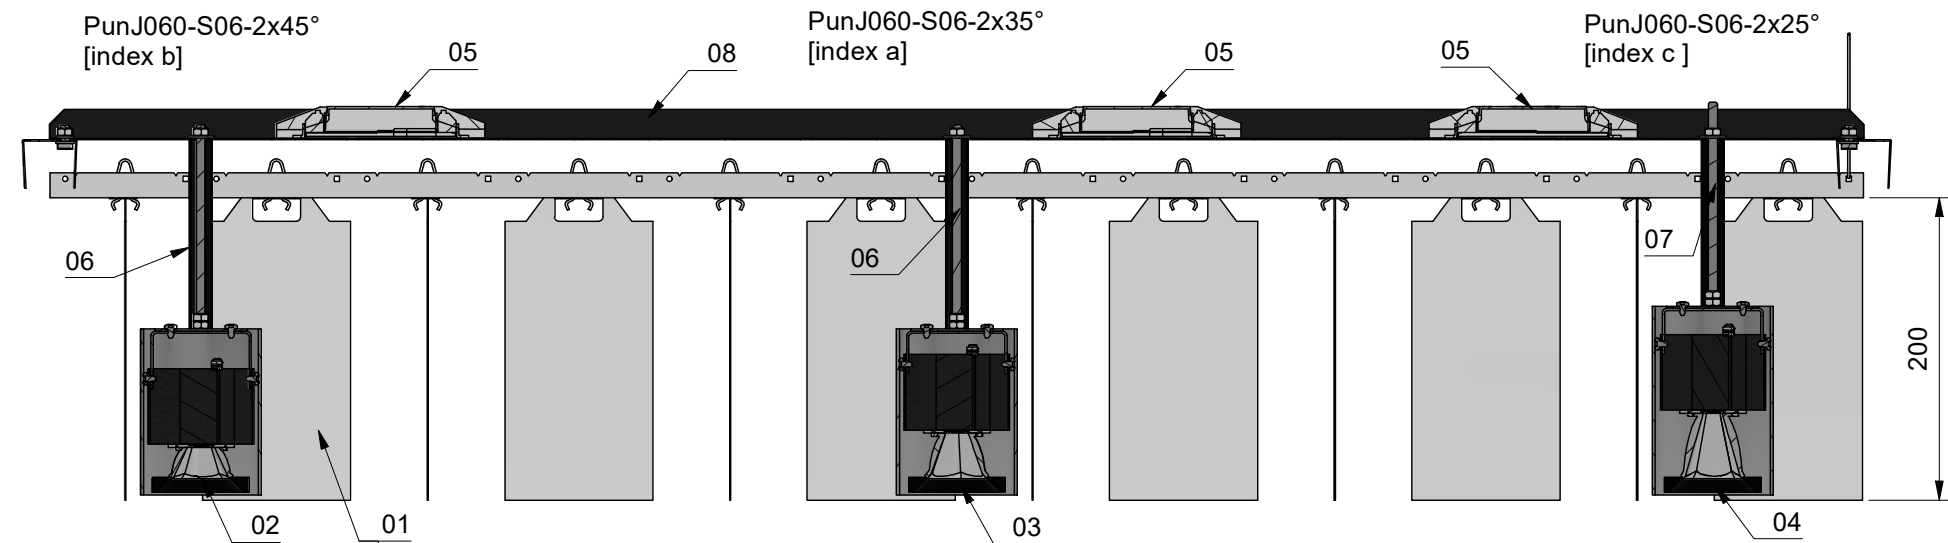


Top View M1:5

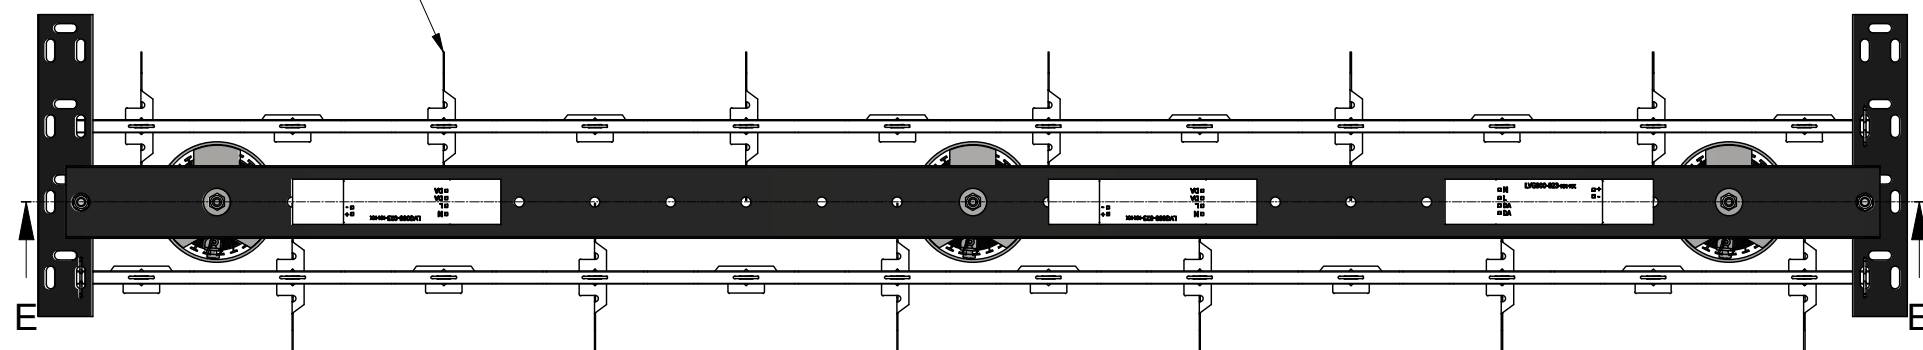



Cut View M1:4
PunJ060-S06-2x45° [index b]

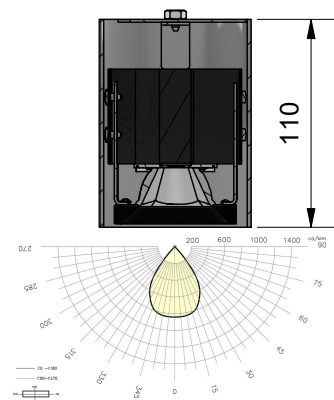

Cut View M1:4
PunJ060-S06-2x35° [index a]

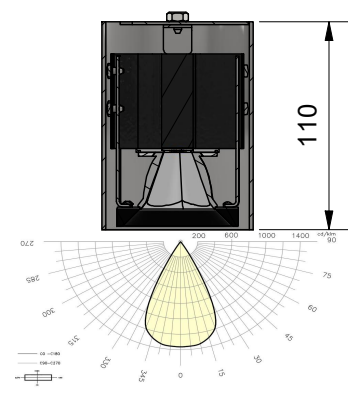

Cut View M1:4
PunJ060-S06-2x25° [index c]

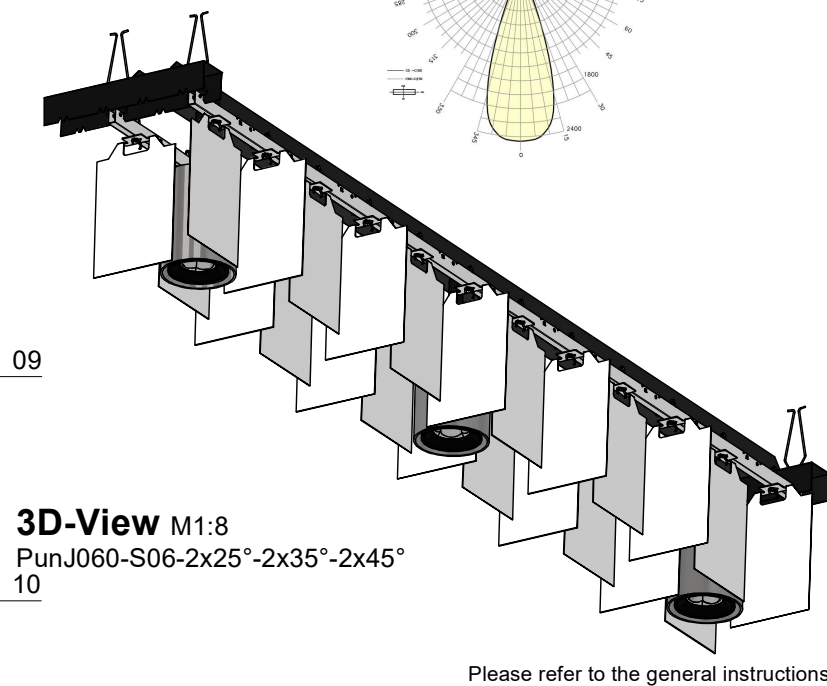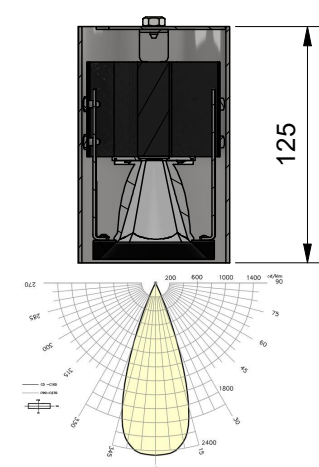

3D-View M1:8
PunJ060-S06-2x25°-2x35°-2x45°
10

PUNTEO J060 - S06

for LIVA ceiling h=200mm

LED Spot for perfect integration in Durlum LIVA ceiling

Light distribution index:

- a: 2x35° | normal-beam | LOR 91%
- b: 2x45° | wide-beam | LOR 91%
- c: 2x25° | narrow-beam | LOR 91%

Variation index of colour temperature and power:

- 01 - 2700K-5000K | 12,5W | 1169/1401lm | CRI>90
- 02 - 4000K | 13W | 1360lm | CRI>90
- 03 - 3000K | 13W | 1250lm | CRI>90

Colour index:

- A- RAL9005 : black
- B- RAL9010 : white
- X- RAL..... : custom colour

Dimension:

øxH [mm] 80x110/115

Protection class: I

Protection system: IP20

Life-Time: average [Ta 25°C] > 50.000h

Order number for example:

# 5-PUN J 060 S06a 02 A	
Art	description
5-PUN J	Order group for PUN J
060	light emitting surface in ø
S06	System S06
a	light distribution - 2x35°
02	light colour - 4000K
A	housing colour - RAL9005

01	Durlum LIVA ceiling
02	PUNJ60-S06-2x45°
03	PUNJ60-S06-2x35°
04	PUNJ60-S06-2x25°
05	LED-driver
06	mounting Set 35°/45° black or white
07	mounting Set 25° black or white
08	crossbar Pitch 100/120mm black or white
09	housing for Punteo
10	antiglare tube black
11	reflektor Punteo
12	

Electrical connection may only be carried out by qualified personnel

This drawing is passed on with all rights reserved to durlum and must ONLY be used for common purpose projects. Transmission to third parties especially competitors is prohibited! durlum GmbH

Approved:

DIN ISO 9001 certified company management system Reg. No. 20 100 801		Point Punteo J060 S06 45°/35°/25° LED - Spot for LIVA ceiling h=200mm durlum technical documents		
date	name			
drw. 19.02.2025	dioyen			durlum GmbH 79650 Schopfheim Germany
rev.				Tel. 0049 7822 39050
M %	format A3	PUNJ060-S06		Email info@durlum.de

Please refer to the general instructions for the operation

mounting Set for LIVA ceiling h=200mm overview

for connection to crossbar




PUNJ60-S06-Z10

Mounting set - LIVA - height 200 mm - black for attaching the luminaire to the crossbar for PUNTEO-J60 S06 for 2x35° and 2x45°
Surface: black matt, sim. to RAL 9005
consisting of:
- Spacer
- M6 threaded rod
- 2 x M6 nuts
- 1 body washer M6 galvanized



PUNJ60-S06-Z11

Mounting set - LIVA - height 200 mm - black for attaching the luminaire to the crossbar for PUNTEO-J60 S06 for 2x25°
Surface: black matt, sim. to RAL 9005
consisting of:
- Spacer
- M6 threaded rod
- 2 x M6 nuts
- 1 body washer M6 galvanized



PUNJ60-S06-Z12

Mounting set - LIVA - height 200 mm - white for attaching the luminaire to the crossbar for PUNTEO-J60 S06 for 2x35° and 2x45°
Surface: white matt, similar to RAL 9010
consisting of:
- Spacer
- M6 threaded rod
- 2 x M6 nuts
- 1 body washer M6 galvanized




PUNJ60-S06-Z13

Mounting set - LIVA - height 200 mm - white for attaching the luminaire to the crossbar for PUNTEO-J60 S06 for 2x25°
Surface: white matt, similar to RAL 9010
consisting of:
- Spacer
- M6 threaded rod
- 2 x M6 nuts
- 1 body washer M6 galvanized


This drawing is passed on with all rights reserved to durlum and must ONLY be used for common purpose projects. Transmission to third parties especially competitors is prohibited! durlum GmbH

Please refer to the general instructions for the operation

Approved:


DIN ISO 9001 certified company Management system Reg. No. 20 100 8 001		mounting set LIVA h=200mm black or white durlum technical documents		 d u r l u m G m b H 79650 Schopfheim Germany Tel. 0049 7822 39050 Email info@durlum.de
date	name			
drw. 20.02.2025	dioyen			
rev.				
M %	format A3	PUNJ060-S06		

crossbar PITCH 100+120 for LIVA ceiling h=100/150/200mm overview

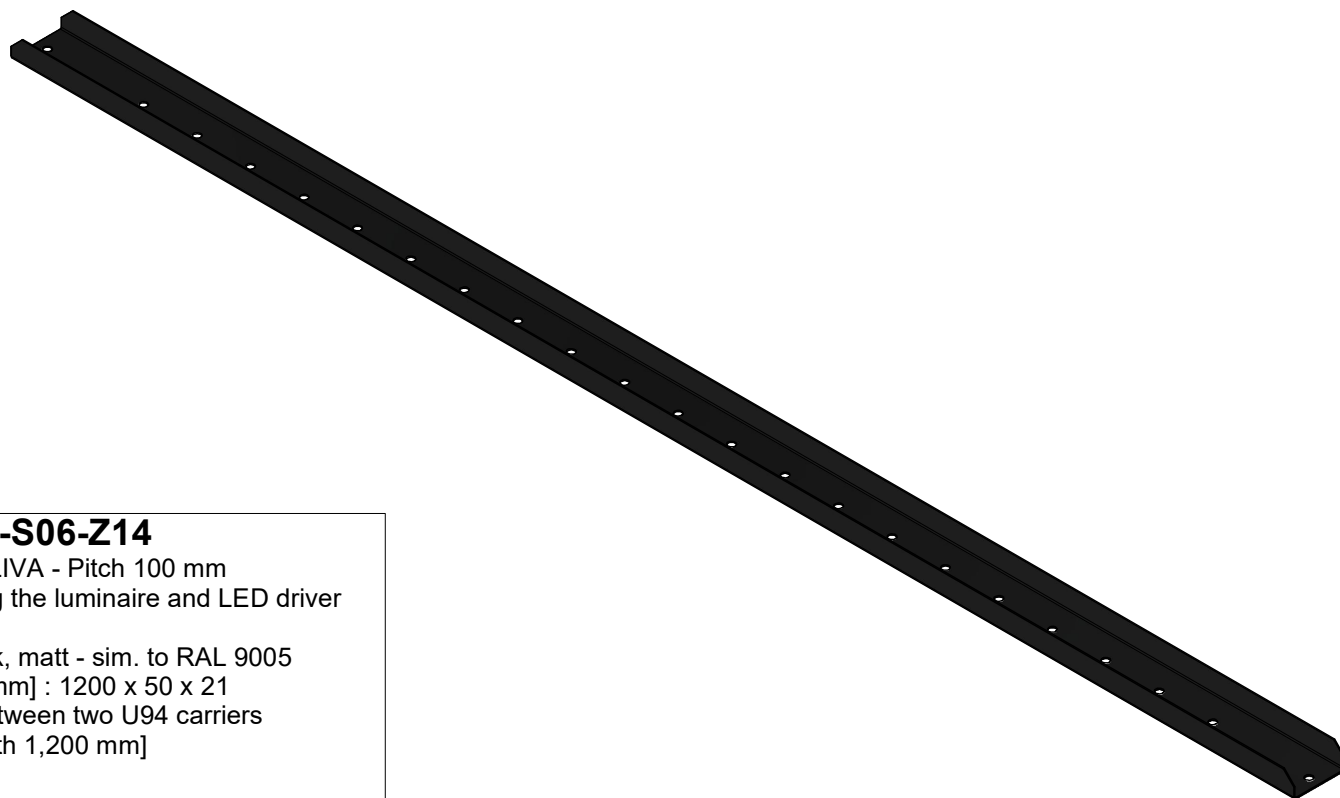


PUNJ60-S06-Z14

Crossbar - LIVA - Pitch 100 mm
for mounting the luminaire and LED driver
unit
Finish: black, matt - sim. to RAL 9005
L x W x H [mm] : 1200 x 50 x 21
Mounted between two U94 carriers
[LIVA - length 1,200 mm]

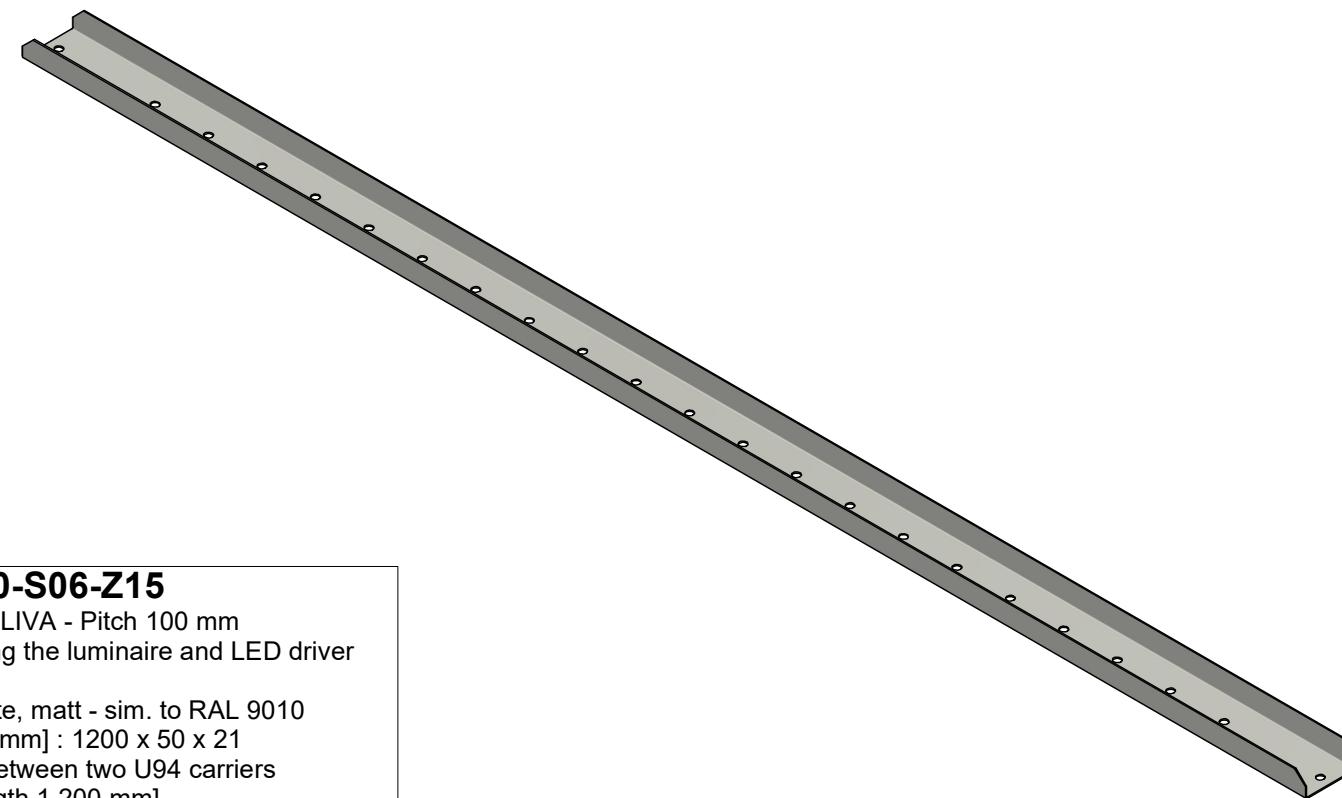


PUNJ60-S06-Z15

Crossbar - LIVA - Pitch 100 mm
for mounting the luminaire and LED driver
unit
Finish: white, matt - sim. to RAL 9010
L x W x H [mm] : 1200 x 50 x 21
Mounted between two U94 carriers
[LIVA - length 1,200 mm]

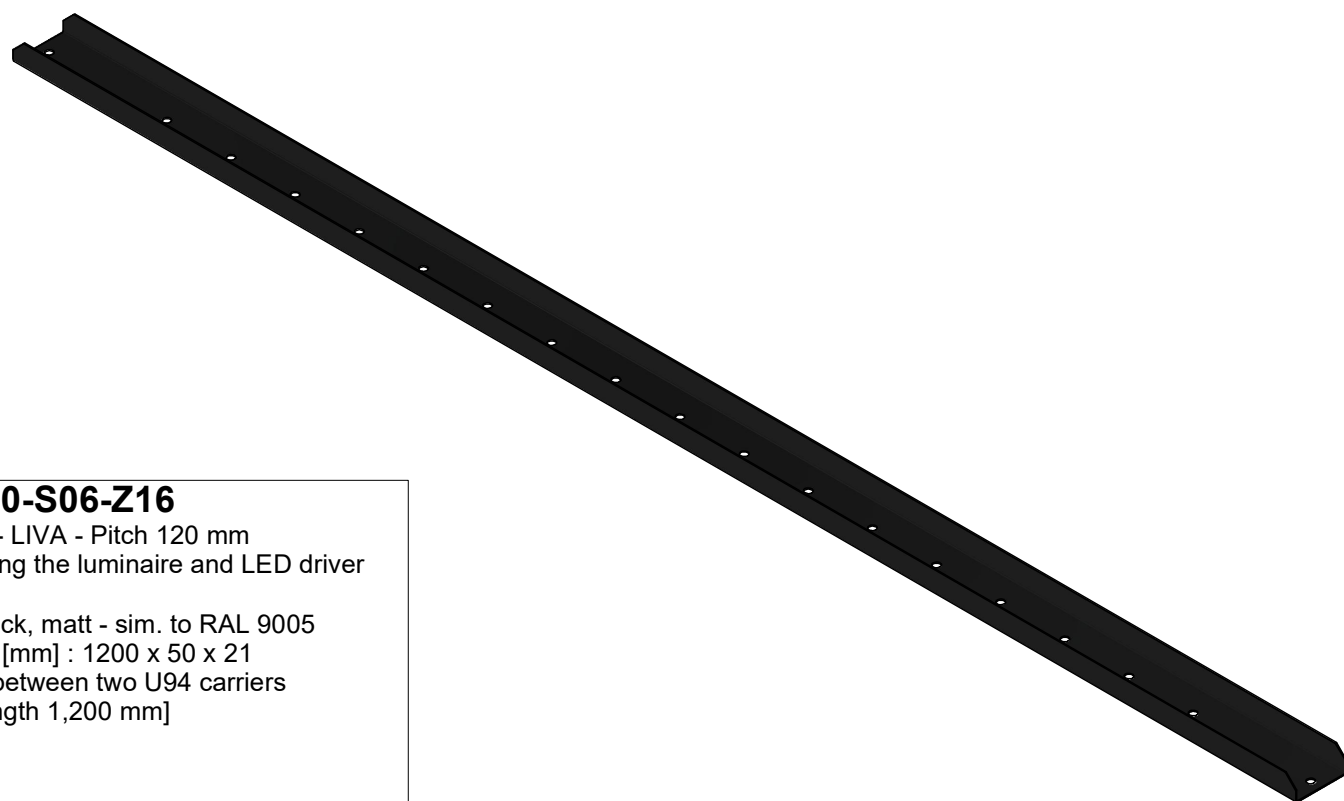

PUNJ60-S06-Z16

Crossbar - LIVA - Pitch 120 mm
for mounting the luminaire and LED driver
unit
Finish: black, matt - sim. to RAL 9005
L x W x H [mm] : 1200 x 50 x 21
Mounted between two U94 carriers
[LIVA - length 1,200 mm]

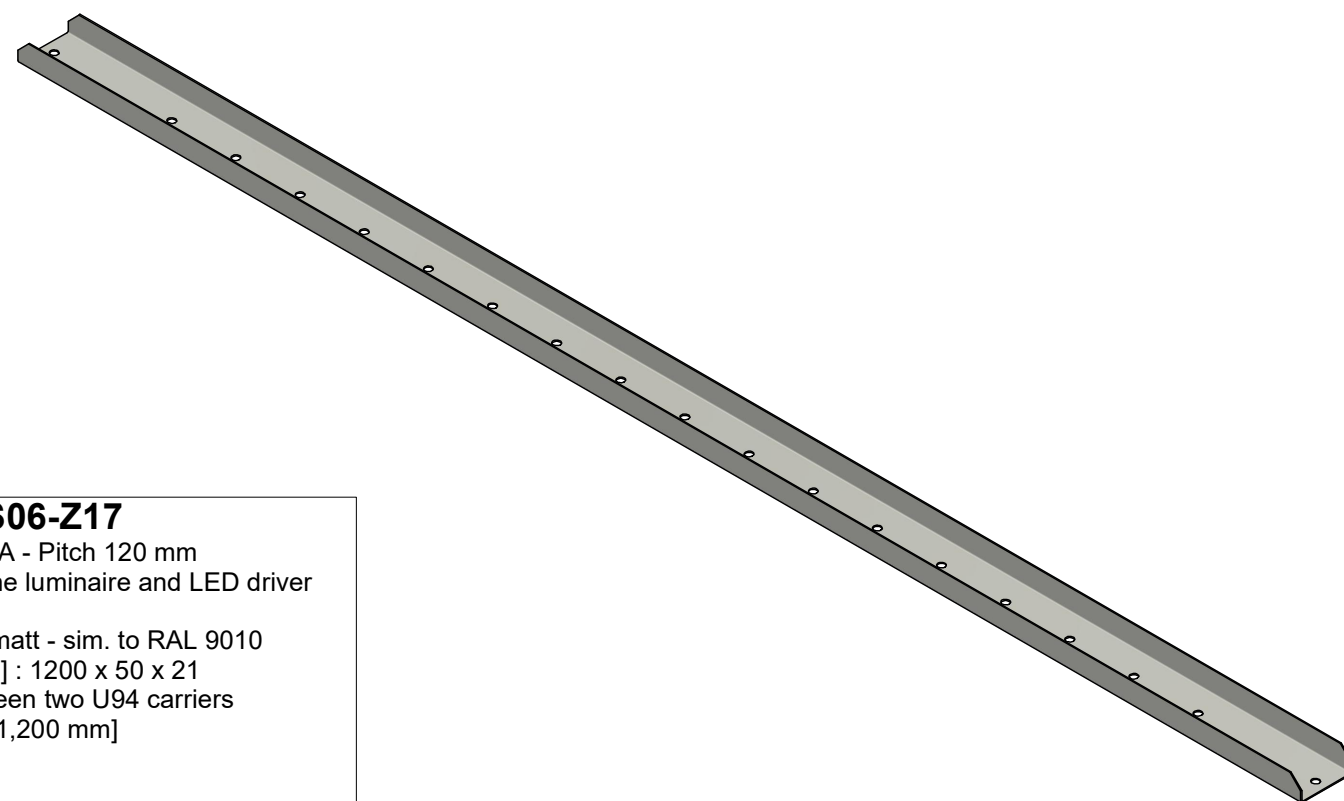


PUNJ60-S06-Z17

Crossbar - LIVA - Pitch 120 mm
for mounting the luminaire and LED driver
unit
Finish: white, matt - sim. to RAL 9010
L x W x H [mm] : 1200 x 50 x 21
Mounted between two U94 carriers
[LIVA - length 1,200 mm]

This drawing is passed on with all rights reserved to durlum and must ONLY be used for common purpose projects.
Transmission to third parties especially competitors is prohibited! durlum GmbH

Please refer to the general instructions for the operation

Approved:

DIN ISO 9001 certified company Reg. No. 20 100 8 001		crossbar Pitch 100+120 h=100/150/200 black or white durlum technical documents		 d u r l u m G m b H 79650 Schopfheim Germany Tel. 0049 7822 39050 Email info@durlum.de
date	name			
drw. 20.02.2025	dioyen			
rev.				
M %	format A3	PUNJ060-S06		