

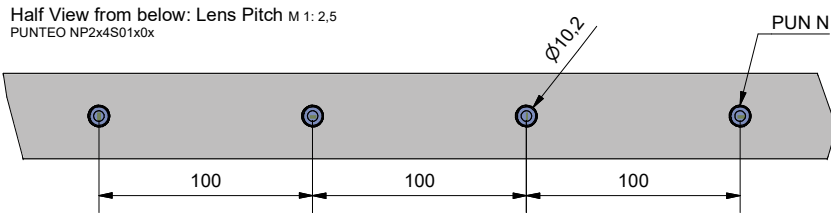
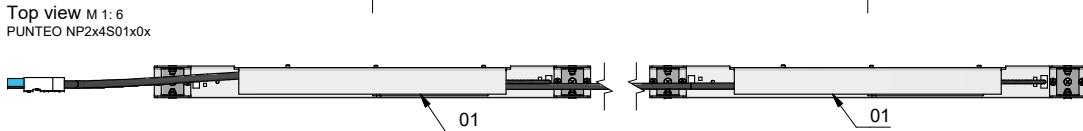



PUNTEO NP 2x4 S01: integration in Polylam ceiling Modul

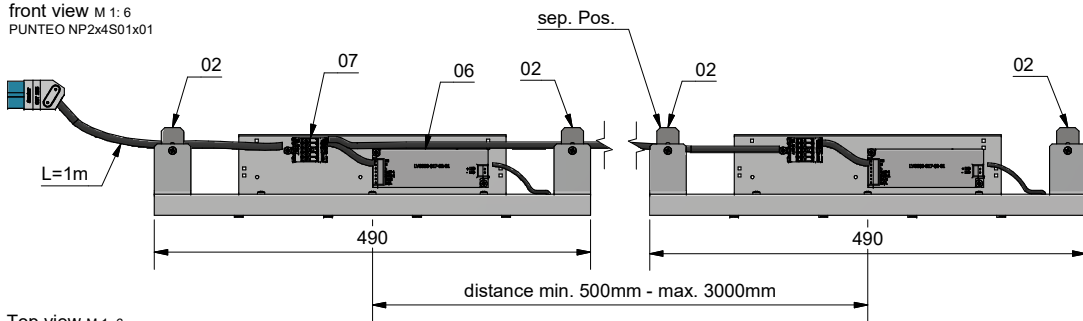

detail view M 1: 1
PUNTEO NP2x4S01x0x

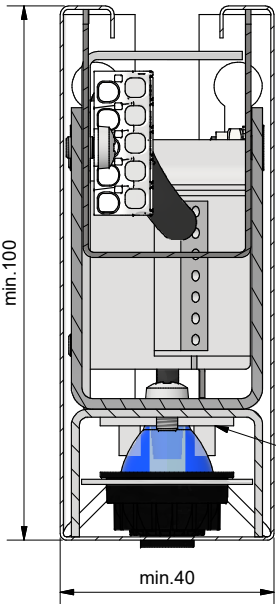


02 Mounting clamp bracket unit:
advertised separately for the
desired Polylam Baffle Height!

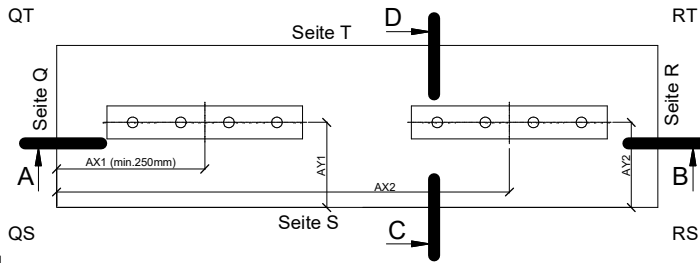

09
to order sepa.
optional

No isolating material in the
area of lights and drivers!




Technik Stand 2024 - 04		* in development	
<small>(techn. Angaben bei Volllast)</small>			
Order number - 4000K	PUNNP2x4S01a01	PUNNP2x4S01b01	
Order number - 3000K	PUNNP2x4S01a02	PUNNP2x4S01b02	
Order number - 2700 / 5000K	PUNNP2x4S01a03 *	PUNNP2x4S01b03 *	
L x W x Height [mm]	2x 490 x 36 x 91	2x 490 x 36 x 91	
Surface	natural anodized	natural anodized	
Light Modul Weight [kg - aprox.]	2 x 1,5	2 x 1,5	
Light distribution	2 x 38°	2 x 20°	
Colour rendering index CRI	> 80	> 80	
LED lumen [@ 350mA] 4x4 LEDs	2 x 1984 lm @ 4000K 2 x 1840 lm @ 3000K 2 x 1864 lm @ 2700 / 5000K	2 x 1984 lm @ 4000K 2 x 1840 lm @ 3000K 2 x 1864 lm @ 2700 / 5000K	
Light output ration - LOR [%]	75%	71%	
Total Power [W]	32	32	
Dali Address / LED-Driver	1 / 1 tunable white: 2/2	1 / 1 tunable white: 2/2	
electric connection	Stecker GST1515 code pastelblau (230V / 50Hz +Dali)	Stecker GST1515 code pastelblau (230V / 50Hz +Dali)	
Modul PUNNP2x4-S01 per circuit breaker @ C13 / B13	14 / 8 tunable white 7 / 4	14 / 8 tunable white 7 / 4	


PUNTEO® - NP2x4 - S01

POINT | Integration in Polylam Baffle

- Ceiling cut-out: assembled by Durlum ceiling system
- Protection class: I
- Degree of protection: IP20
- Ambient temp.: <math><35^{\circ}\text{C}</math>
- Elektric connection: 230V / 50Hz + Dali
- Accessories: Is factory assembled with clamping technology in Polylam Baffle. Luminaire is delivered plug ready!

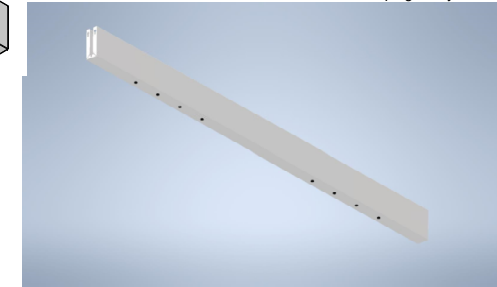

light distribution curve [LDC]

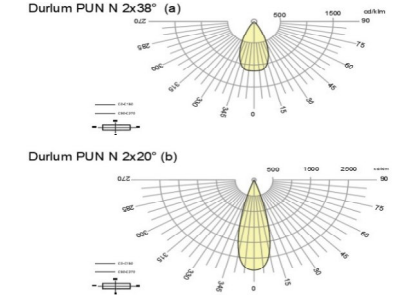

01	LED lighting insert
02	Mounting clamp bracket unit (advertised separately)
03	Polylam Baffle for 8 x PUN N
04	LED-board
05	Lens & shader
06	LED driver
07	Connection terminal 5pol.
08	Male Plug GST1515 code pastel blue L=1m
09	Female Plug GST 1515 code pb for on site connection
10	

Stand 09.04.24

Approved:	
DIN ISO 9001 certified since 1995 Reg. No. 10 538 89	POINT PUNTEO NP 2x4 S01 durlum technical documents
date dvw. 21.03.2024	name probst
rev. M %	probst
integration in Metal Polylams	
PUN NP 2x4 S01-x0x	
durlum ceiling lighting durlum GmbH 79650 Schopfleim Germany	
Tel. 0949 7622 39050 Email info@durlum.de	

This drawing is passed on with all rights reserved to durlum and must ONLY be used for common purpose projects. Transmission to third parties especially competitors is prohibited! durlum GmbH

Please refer to the general instructions for the operation